

BC-SERIES

Indoor Speakers

User Manual




BC3	75mm (3"), 60Wmax	White - pair	100.898
		Black - pair	100.899
BC4	100mm (4"), 70Wmax	White - pair	100.901
		Black - pair	100.902
BC5	130mm (5.25"), 90Wmax	White - pair	100.904
		Black - pair	100.905
BC6	165mm (6.5"), 120Wmax	White - pair	100.907
		Black - pair	100.908
BC8	200mm (8"), 180Wmax	White - pair	100.910
		Black - pair	100.911

Introduction

Thank you for choosing the BC-series indoor speakers. These speakers have been designed to offer high quality sound for low impedance installations. Please read and follow the instructions in this manual to achieve the best results and avoid damage through misuse.

Installation

The BC-series speakers are each supplied with a wall-mounting bracket which allows 90° lateral adjustment. When fixing to a wall or ceiling, use the bracket to mark out the fixing points and use appropriate fixings for the substrate that the speaker will be attached to, ensuring that the fixing is strong enough to bear the weight.




Once the bracket is fitted, support the speaker in position and attach top and bottom using the supplied screw caps and adjust to the required angle. Further mounting points are available at the rear of the speaker, should it be preferred to use different mounting methods (e.g. 129.130 – 129.124UK)

Note: Do not over-tighten the screw caps as this can cause the threaded inserts to fail.

Connection

BC-series speakers are connected via 2 spring terminals at the rear of the enclosure. With the amplifier switched off, strip the speaker wire ends and connect the "+" wire to the red terminal and connect the "-" wire to the black terminal.

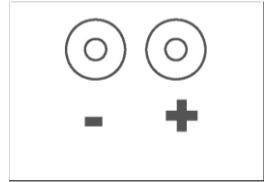

When connecting to the amplifier, refer to the amplifier manufacturer's manual to ensure that total speaker impedance (Ω) on any channel is not less than that recommended for the amplifier. It is also imperative that the amplifier does not deliver more power than can be handled by the BC speaker. Refer to the amplifier manual and specifications below to calculate this. Normally, it is recommended that the amplifier is capable of the RMS power rating of the speaker but cannot ever exceed the Max power rating.

Specifications

Model	BC3	BC4	BC5	BC6	BC8
Woofers	75mm \emptyset (3")	100mm \emptyset (4")	130mm \emptyset (5.25")	165mm \emptyset (6.5")	165mm \emptyset (6.5")
Tweeter	25mm \emptyset (1")	25mm \emptyset (1")	25mm \emptyset (1")	25mm \emptyset (1")	25mm \emptyset (1")
Freq response	120Hz - 20kHz	110Hz - 20kHz	100Hz - 20kHz	80Hz - 20kHz	50Hz - 20kHz
Power max : 8 Ω	60W	70W	90W	120W	180W
Power rms: 8 Ω	30W	35W	45W	60W	90W
Dimensions: mm	106 x 153 x 106	150 x 195 x 150	180 x 240 x 180	220 x 280 x 220	280 x 375 x 260
Weight	840g	1.25kg	2.00kg	2.50kg	5.26kg
SPL @ 1W/1m	88dB	88dB	88dB	89dB	89dB


Caution

The BC-series speakers are intended for indoor use. Avoid moist or dusty environments.


Avoid excess heat and exposure to direct sunlight.

Take care not to overload speakers. HF drivers are especially prone to damage through overload.


BC3

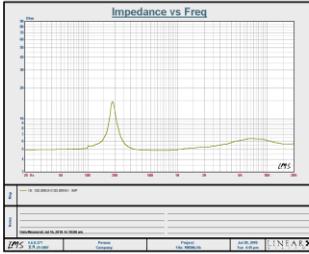


BC4

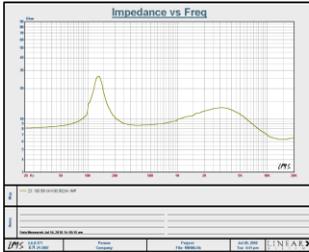


BC5

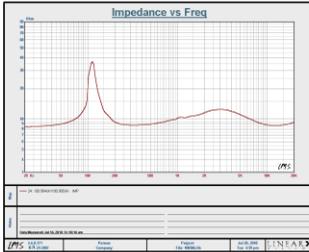


BC6

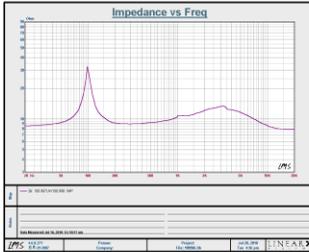

BC8

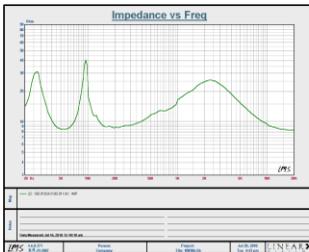


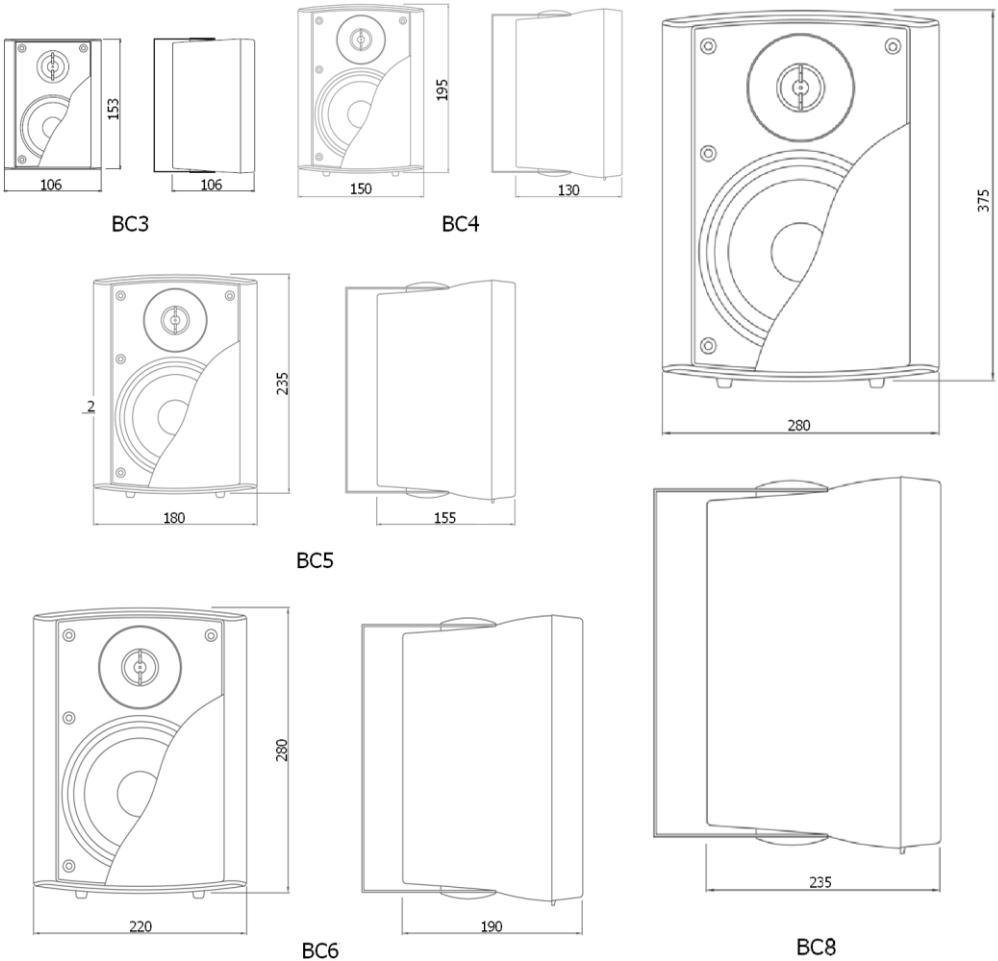


Disposal: The "Crossed Wheelie Bin" symbol on the product means that the product is classed as Electrical or Electronic equipment and should not be disposed with other household or commercial waste at the end of its useful life. The goods must be disposed of according to your local council guidelines.

Errors and omissions excepted. Copyright© 2021.
 AVSL Group Ltd. Unit 2-4 Bridgewater Park, Taylor Rd. Manchester. M41 7JQ
 AVSL (EUROPE) Ltd, Unit 3D North Point House, North Point Business Park, New Mallow Road, Cork, Ireland


1

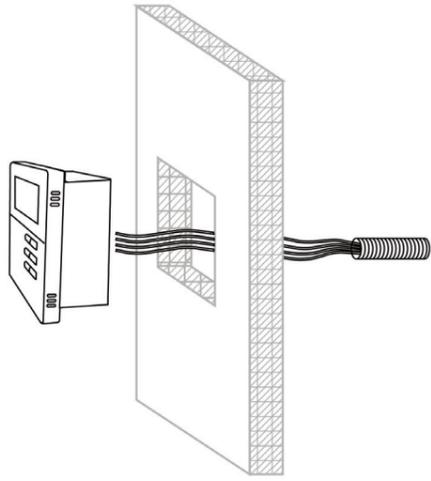

2

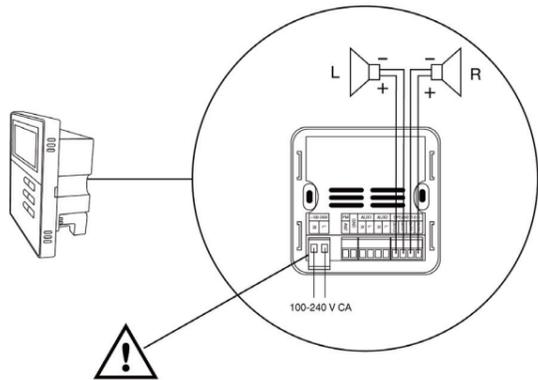

3

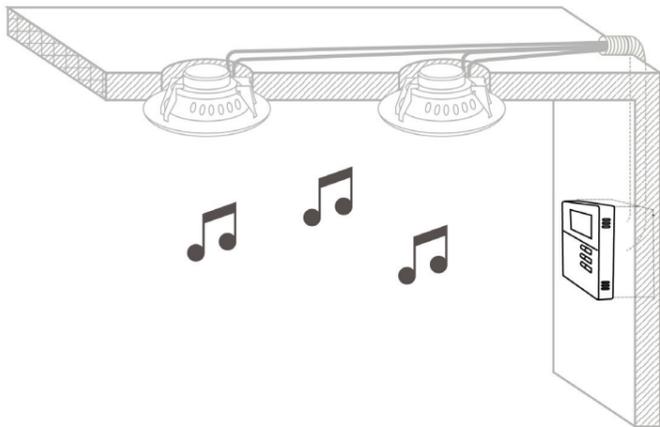

For more information, please visit our website at web www.fonestar.com
 Para más información, visite nuestra web www.fonestar.com
 Pour plus d'information, visitez notre page web www.fonestar.com
 Para mais informações, consulte a nossa página web www.fonestar.com

EN
SIMPLIFIED EU DECLARATION OF CONFORMITY
 FONESTAR SISTEMAS S.A. hereby declares that the amplifier WA-66R is in compliance with the Directive 2014/53/EU.
 The complete text of the EU Declaration of Conformity is available at the following internet address:
fonestar.com/ES/WA-66R

ES
DECLARACIÓN UE DE CONFORMIDAD SIMPLIFICADA
 Por la presente, FONESTAR SISTEMAS S.A. declara que el amplificador WA-66R es conforme con la Directiva 2014/53/EU.
 El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente:
fonestar.com/ES/WA-66R

FR
DÉCLARATION UE DE CONFORMITÉ SIMPLIFIÉE
 FONESTAR SISTEMAS S.A. déclare que le amplificateur WA-66R est conforme à la Directive 2014/53/EU.
 Le texte complet de la déclaration UE de conformité se trouve disponible sur le site Internet suivant:
fonestar.com/ES/WA-66R

PT
DECLARAÇÃO UE DE CONFORMIDADE SIMPLIFICADA
 A abaixo assinada, FONESTAR SISTEMAS S.A. declara que o amplificador WA-66R está em conformidade com a Diretiva 2014/53/EU.
 O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet:
fonestar.com/ES/WA-66R

WA-66R

WALL AMPLIFIER BT/USB/MicroSD/FM
 AMPLIFICADOR DE PARED BT/USB/MicroSD/FM
 AMPLIFICATEUR MURAL BT/USB/MicroSD/FM
 AMPLIFICADOR DE PAREDE BT/USB/MicroSD/FM



QUICK START GUIDE/GUÍA RÁPIDA/
 GUIDE DE DÉMARRAGE RAPIDE/GUIA RÁPIDO

FONESTAR

DESCRIPTION/DESCRIPCIÓN/DESCRIPTION/DESCRIÇÃO


EN
 - POWER: 2 x 10 W RMS
 - Bluetooth 2.1 EDR receiver
 - USB/MicroSD/MP3 file player
 - FM radio with 30 automatic presets

ES
 - POTENCIA: 2 x 10 W RMS
 - Receptor bluetooth 2.1 EDR
 - Reproductor USB/MicroSD/MP3
 - Radio FM con 30 presintonías automáticas


FR
 - PUISSANCE: 2 x 10 W RMS
 - Récepteur bluetooth 2.1 EDR
 - Reproducteur USB/MicroSD de fichiers MP3
 - Radio FM avec 30 pré-syntonies automatiques

PT
 - POTÊNCIA: 2 x 10 W RMS
 - Recetor bluetooth 2.1 EDR
 - Leitor USB/MicroSD de ficheiros MP3
 - Sintonizador digital de rádio FM


CONTROLS

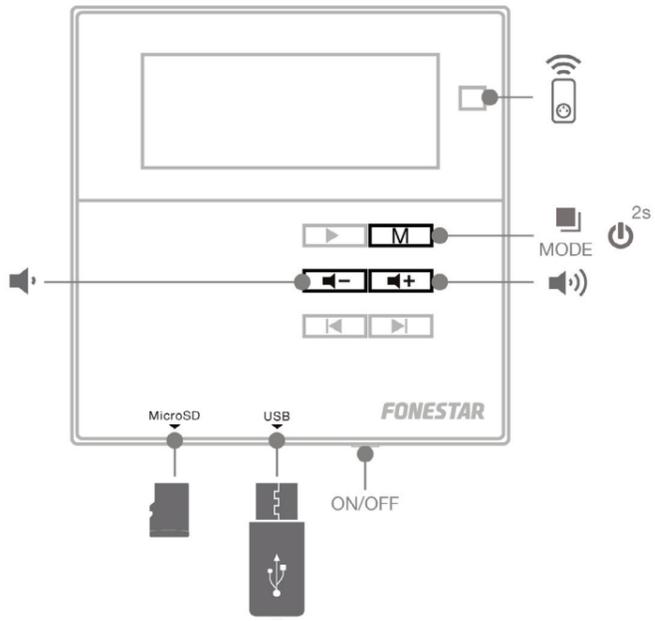


MicroSD/USB MODE

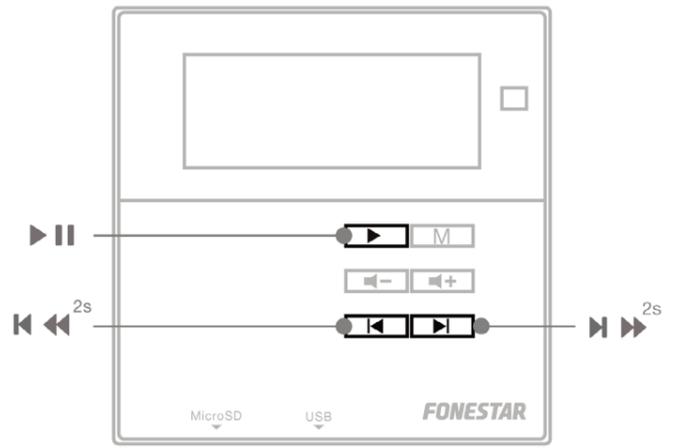


FM MODE

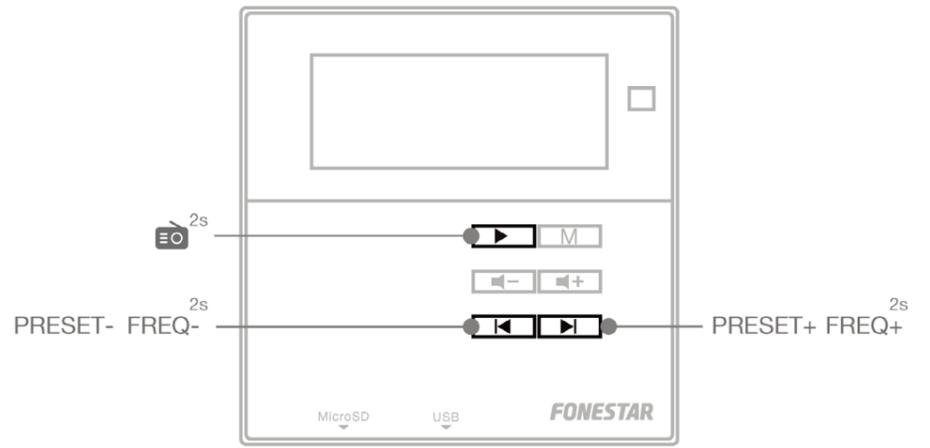


CONNECTIONS

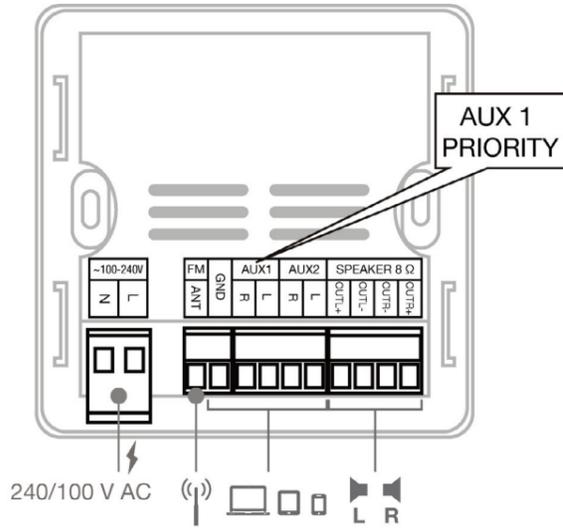

PERSONALIZED TUNING OF FM STATIONS

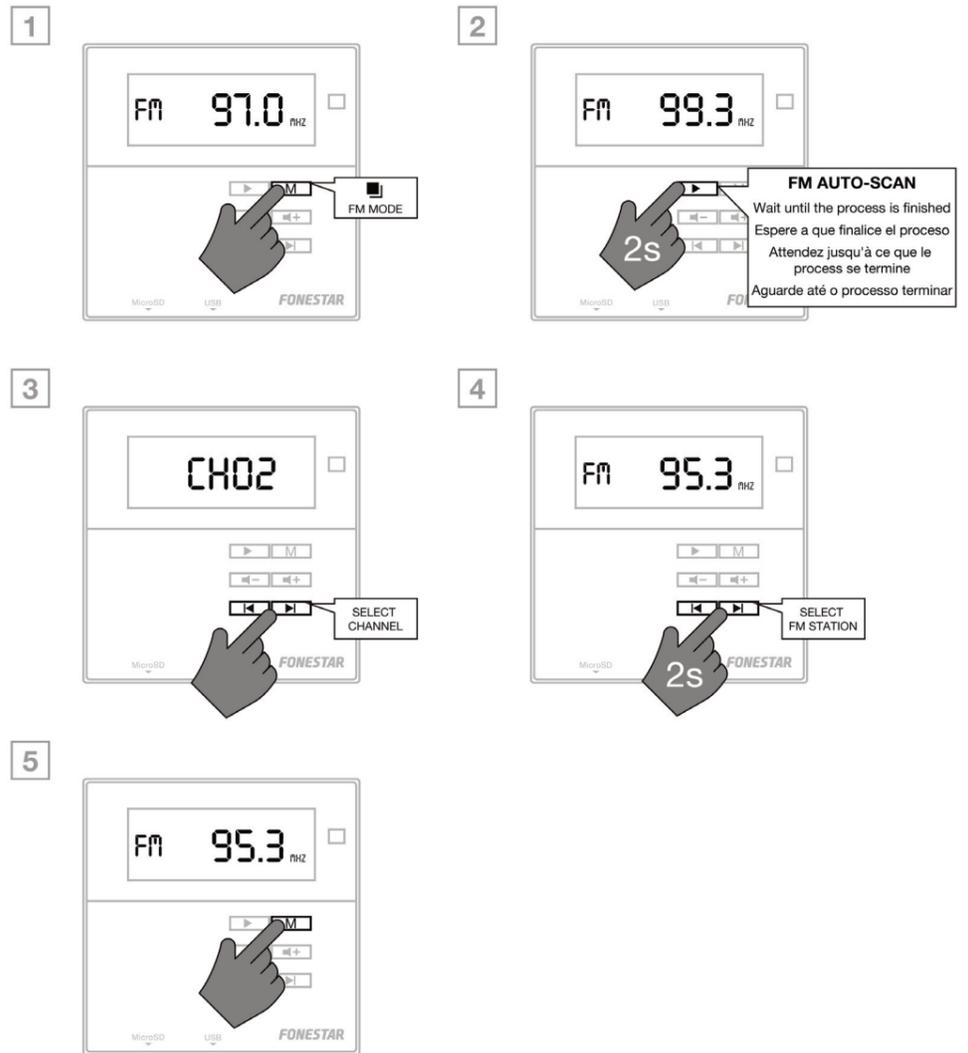

REMOTE CONTROL

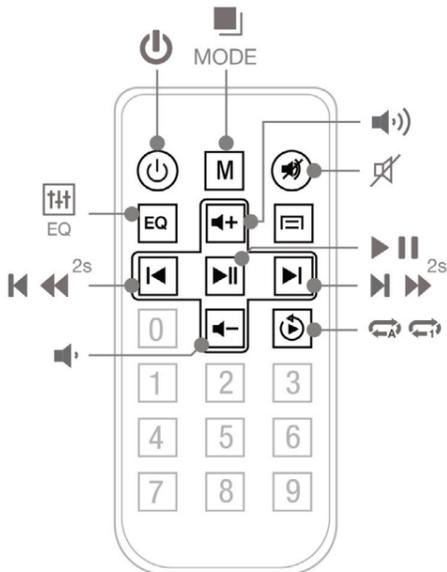

BT MODE

