


CONTROL MENU

If the display is in standby, unlock it:



MENU		DESCRIPTION	
SET UP	Dimmer ALL	000-255	Master dimmer
	Balance	Dimmer Red	000-255
		Dimmer Green	000-255
		Dimmer Blue	000-255
	Key lock	Off	Activate key lock yes/no
		On	
	Remote	Off	Activate IR remote yes/no
		ON	
	Display	30S	Display sleep mode or on
		ON	
	Reset		Reset mode
	Refresh rate	600Hz	Refresh rates
		1200Hz	
		2400HZ	
		4800HZ	
	MAX temp	Choose between 30 - 70	Choose max temp
INFO	Software Ver ***		Shows software version
	Working times *****H *M		Shows Working hours
	RDM:*****		Shows RDM address
DMX ADDRESS		000-512	Select a DMX Channel
CHANNEL		3CH,5CH,8CH,13CH	Select a Channel mode
DIM CURVE		Curv1 (2-3-4)	Select a Dimcurve
DMX STATE		Hold/ Blackout	Select what to do when there is no DMX signal input.
SLAVE MODE		Slave	Select slave mode
AUTO MODE	Speed	01-31	Select speed auto mode
	Auto	01-10	Select different auto mode
MANUAL MODE	Red	000-255	Adjust dimming
	Green	000-255	Adjust dimming
	Bleu	000-255	Adjust dimming
	Strobe	00-20	Adjust strobe
	Color	01-55	Adjust Color

DMX CHANNELS

3 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Red	000-255	Dimmer
2	Green	000-255	Dimmer
3	Blue	000-255	Dimmer

5 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	Master dimmer
2	Red	000-255	Dimmer
3	Green	000-255	Dimmer
4	Blue	000-255	Dimmer
5	Strobe	000-009	Led blue
		010-255	Strobe (from slow to fast)

8 CHANNELS


CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	Master dimmer
2	Red	000-255	Dimmer
3	Green	000-255	Dimmer
4	Blue	000-255	Dimmer
5	Strobe	000-009	No function
		010-255	Strobe (from slow to fast)
6	Static Color	000-009	No function
		010-174	Static color
		175-189	3200k
		190-204	5600k
		205-219	6500k
		220-234	8500k
		235-249	10000k
		250-255	Default
7	Auto program	000-020	No function
		021-030	Auto 1
		031-040	Auto 2
		041-050	Auto 3
		051-060	Auto 4
		061-070	Auto 5
		071-080	Auto 6
		081-090	Auto 7
		091-100	Auto 8
		101-110	Auto 9
		111-120	Auto 10
		121-255	Reserved
8	Auto speed	000-255	Speed slow to fast

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000- 255	Master dimmer
2	Dimmer fine	000- 255	Fine control of master dimmer
3	Red	000- 255	Dimmer
4	Red fine	000- 255	Fine control of Red dimmer
5	Green	000- 255	Dimmer
6	Green fine	000- 255	Fine control of Green dimmer
7	Blue	000- 255	Dimmer
8	Blue fine	000- 255	Fine control of Blue dimmer
9	Strobe	000-009	Leds on
		010-255	Strobe (from slow to fast)
10	Static color	000-009	No function
		010-174	Static color
		175-189	3200k
		190-204	5600k
		205-219	6500k
		220-234	8500k
		235-249	10000k
		250-255	Default
11	Auto mode	000-020	No function
		021-030	Auto 1
		031-040	Auto 2
		041-050	Auto 3
		051-060	Auto 4
		061-070	Auto 5
		071-080	Auto 6
		081-090	Auto 7
		091-100	Auto 8
		101-110	Auto 9
		111-120	Auto 10
		121-255	Reserved
12	Auto speed	000-255	Speed slow to fast
13	Dimming curve	000-015	Null
		016-075	Dimming curve 1
		076-135	Dimming curve 2
		136-195	Dimming curve 3
		196-255	Dimming curve 4

13 CHANNELS



Handwriting practice lines consisting of 20 horizontal dotted lines.

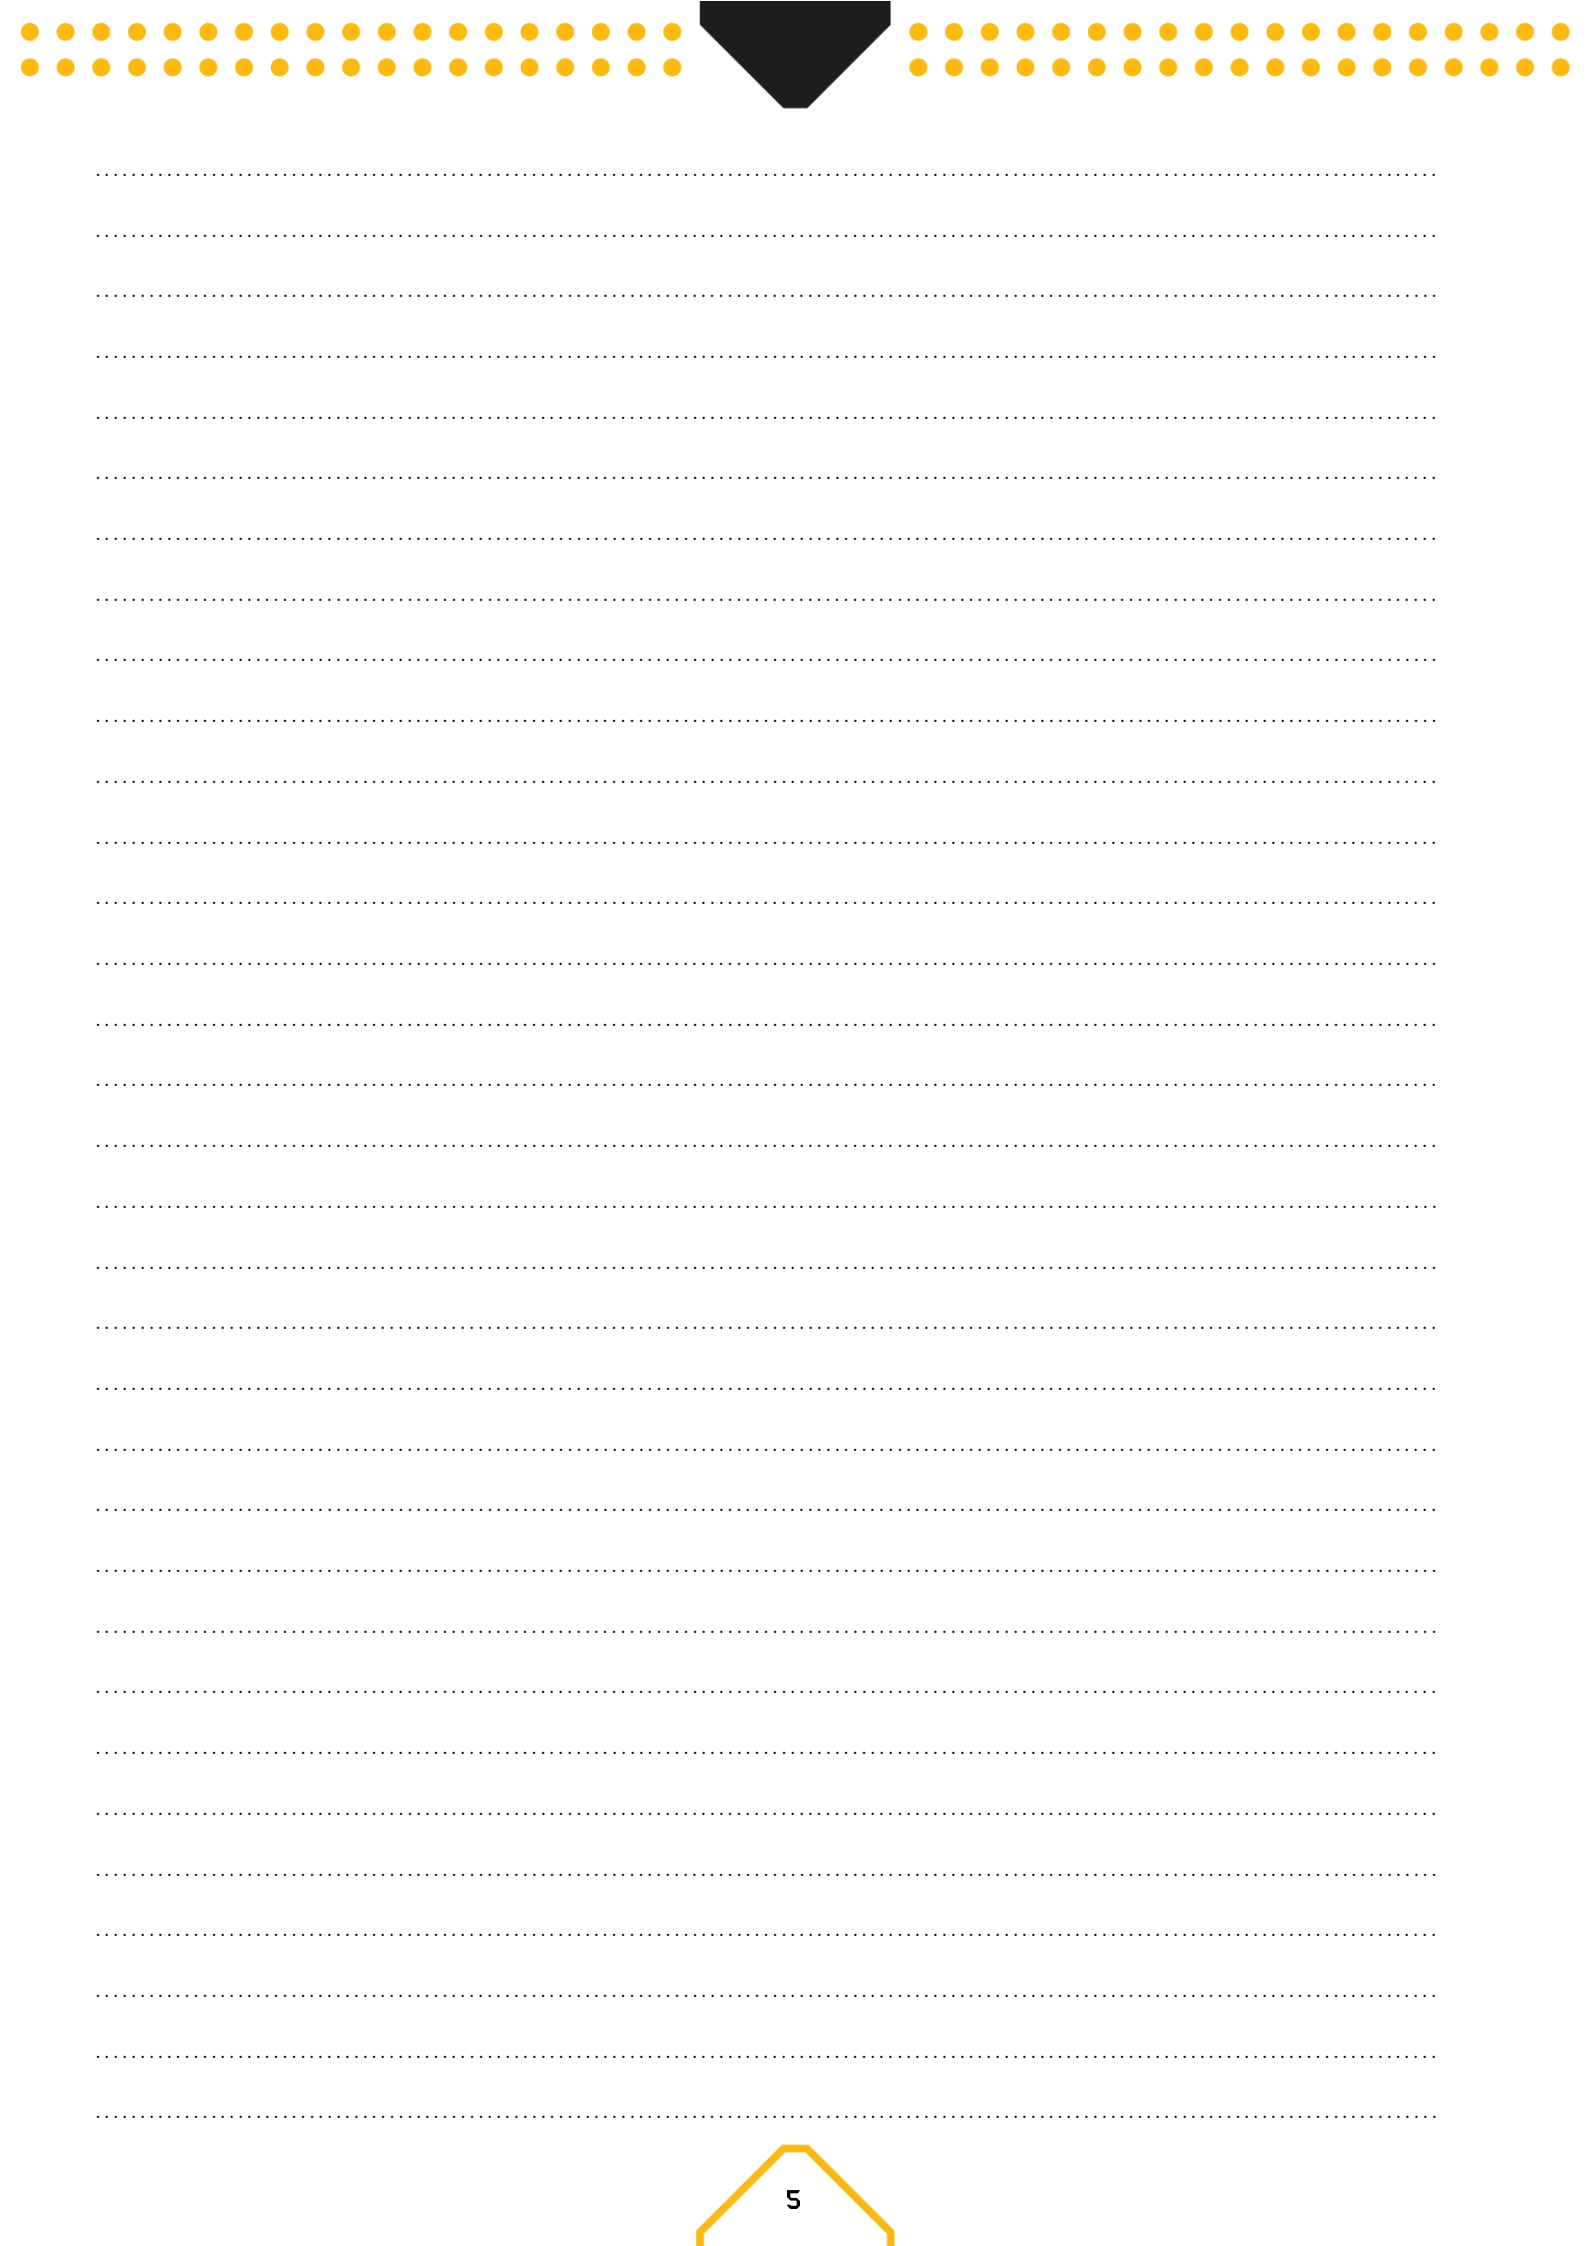



Handwriting practice lines consisting of 25 horizontal dotted lines.