



BEAMZ
MADE
EAZY

150.616 V1.0

HELIOS

QUICK START GUIDE

CONTROL MENU

MENU			DESCRIPTION	
ADDRESS	001-512		Address code settings	
CHANNEL	2CH		2-channel mode	
	6CH		6-channel mode	
	8CH		8-channel mode	
	11CH		11-channel mode	
DMX FAIL	Blackout		Control panel data blackout	
	Hold		Control panel data retention	
FREQUENCY	600HZ		600 refresh rate	
	1200HZ		1200 refresh rate	
	2000HZ		2000 refresh rate	
	4000HZ		4000 refresh rate	
	12KHZ		12K refresh rate	
	25KHZ		25K refresh rate	
CUSTOM	Red: 0-255		Red manual dimming	
	Green: 0-255		Green manual dimming	
	Blue: 0-255		Blue manual dimming	
	White: 0-255		White manual dimming	
	Amber: 0-255		Amber manual dimming	
	UV: 0-255		UV manual dimming	
PROGRAM	Static	Colour:01-32	32 static color blends	
		Speed:00-16	Strobe speed (when the speed is 00, it is a static color mixing)	
	Auto	Speed:01-16	Color jump	
	Fade	Fade 01	Speed:01-16	Color gradient
		Fade 02	Speed:01-16	Color mutant
		Fade 03	Speed:01-16	Color pulse
	Sound	Sound:01		Voice controlled color change
		Sound:02		Voice controlled mutation
		Sound:03		Voice controlled color change strobe
		Sound:04		Voice controlled color change+mutation+color change flicker
	CCT	2000K		Color temperature 2000K
		2200K		Color temperature 2200K
		2400K		Color temperature 2400K
		2600K		Color temperature 2600K
		2800K		Color temperature 2800K
		3200K		Color temperature 3200K
		3600K		Color temperature 3600K
		4000K		Color temperature 4000K
		4400K		Color temperature 4400K
		4800K		Color temperature 4800K
		5200K		Color temperature 5200K
		5600K		Color temperature 5600K
		6000K		Color temperature 6000K
		6400K		Color temperature 6400K
		6800K		Color temperature 6800K
		7200K		Color temperature 7200K
		7600K		Color temperature 7600K
		8000K		Color temperature 8000K
		8400K		Color temperature 8400K
		8800K		Color temperature 8800K

WIRELESS DMX		9200K	Color temperature 9200K
		9600K	Color temperature 9600K
		10000K	Color temperature 10000K
	WiFi	LED_XXX	WiFi mode and link address
	ON	On	Wireless on
		Clear	Clear former data
		Connect	Connect with slaves
		Off	Wireless off
		Receive	Receive (slave - status light is on white)
		Transmit	Send (Master - status light is blue)
RUN TIME	2/4/6/8 hour		Lighting fixture usage time setting
BACK LIGHT	Always on		Display on
	10s		Display standby for 10 seconds, screen off
	20s		Display standby for 20 seconds, screen off
	30s		Display standby for 30 seconds, screen off
IR	ON/OFF		Infrared remote control on/off
MENU LOCK	ON/OFF		Key lock on/off (When locking the screen, long press the UP+DOWN key to unlock)
FACTORY RESET	NO/YES		System self-test reset
CURVE	Led Curve 1		Linear curve
	Led Curve 2		Square curve
	Led Curve 3		Logarithmic curve
	Led Curve 4		S-curve
INFORMATION	Version	Vxxx	Software version
	Current Time	00H00M00S	Time used
	Temperature	xx°C	Current temperature
	RDM	ID xxx	RDM ID number

DMX CHANNELS

2 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMING	000-255	Total dimming
		000-010	Off light
		011-020	Color temperature 2000K
		021-030	Color temperature 2200K
		031-040	Color temperature 2400K
		041-050	Color temperature 2600K
		051-060	Color temperature 2800K
		061-070	Color temperature 3200K
		071-080	Color temperature 3600K
		081-090	Color temperature 4000K
		091-100	Color temperature 4400K
		101-110	Color temperature 4800K
		111-120	Color temperature 5200K
2	COLOR TEMPERATURE	121-130	Color temperature 5600K
		131-140	Color temperature 6000K
		141-150	Color temperature 6400K
		151-160	Color temperature 6800K
		161-170	Color temperature 7200K
		171-180	Color temperature 7600K
		181-190	Color temperature 8000K
		191-200	Color temperature 8400K
		201-210	Color temperature 8800K
		211-220	Color temperature 9200K
		221-230	Color temperature 9600K
		231-240	Color temperature 10000K
		241-255	No function

6 CHANNELS


CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMING	000-255	Red linear dimming
2		000-255	Green linear dimming
3		000-255	Blue linear dimming
4		000-255	White linear dimming
5		000-255	Amber linear dimming
6		000-255	UV linear dimming

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMING	000-255	Total dimming
		000-009	Off light
2		010-255	Strobe (slow to fast)
3		000-255	Red linear dimming
4		000-255	Green linear dimming
5		000-255	Blue linear dimming
6		000-255	White linear dimming
7		000-255	Amber linear dimming
8		000-255	UV linear dimming

11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMING	000-255	Total dimming
2		000-255	Red linear dimming
3		000-255	Green linear dimming
4		000-255	Blue linear dimming
5		000-255	White linear dimming
6		000-255	Amber linear dimming
7		000-255	UV linear dimming
8	STROBE	000-009	Off light
		010-255	Strobe (slow to fast)
9	COLOR TEMPERATURE	000-010	Off light
		011-020	Color temperature 2000K
		021-030	Color temperature 2200K
		031-040	Color temperature 2400K
		041-050	Color temperature 2600K
		051-060	Color temperature 2800K
		061-070	Color temperature 3200K
		071-080	Color temperature 3600K
		081-090	Color temperature 4000K
		091-100	Color temperature 4400K
		101-110	Color temperature 4800K
		111-120	Color temperature 5200K
		121-130	Color temperature 5600K
		131-140	Color temperature 6000K
		141-150	Color temperature 6400K
		151-160	Color temperature 6800K
		161-170	Color temperature 7200K
		171-180	Color temperature 7600K
		181-190	Color temperature 8000K
		191-200	Color temperature 8400K
		201-210	Color temperature 8800K
		211-220	Color temperature 9200K
		221-230	Color temperature 9600K
		231-240	Color temperature 10000K
		241-255	No function
10	MODE	000-009	OFF light
		010-050	Static color mixing
		051-100	Jump Mode
		101-150	Gradient mode
		151-200	Mutation pattern
		201-215	Color changing voice control
		216-230	Color strobe voice control
		231-245	Mutant voice control
		246-255	Respiratory voice control
11	SPEED	000-255	Speed

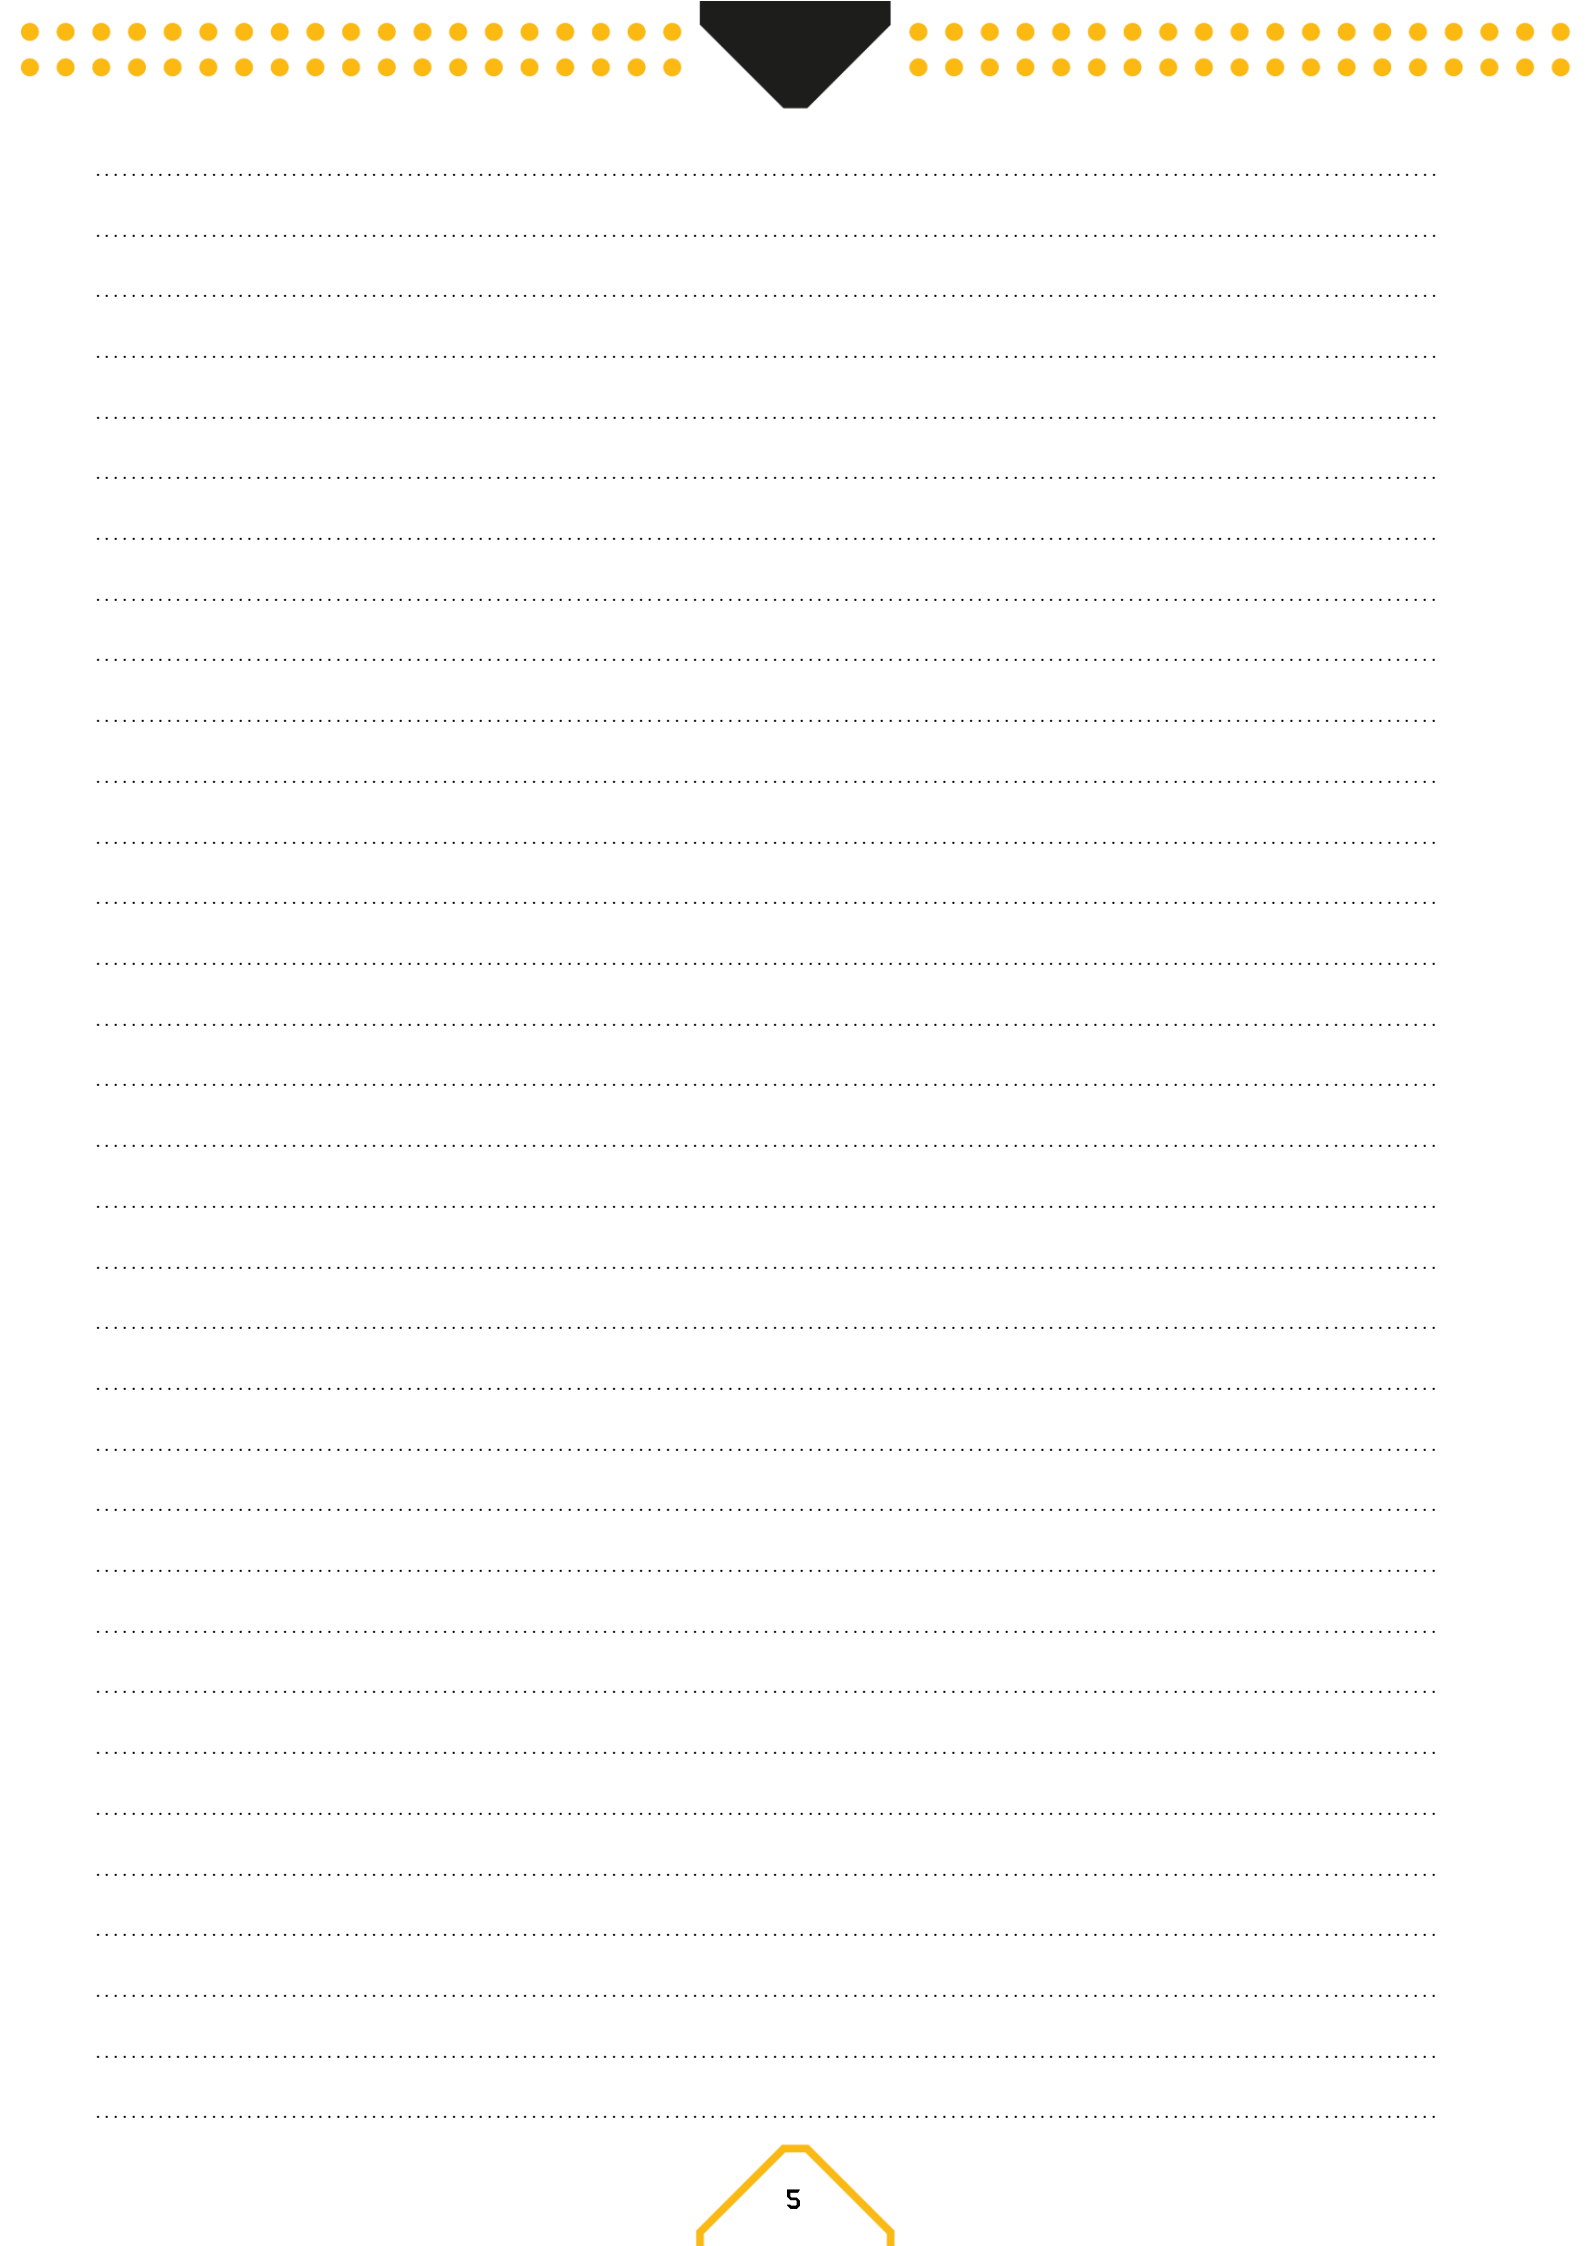



Handwriting practice lines consisting of 20 horizontal dotted lines.



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT

 **beamZ^{Pro}**

offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!



BEAMZLIGHTING.COM