beamZ Pro

BEAMZ
MADE
EAZY

150.804_150.824 V1.0

BAC324 & 334

QUICK START GUIDE

CONTROL MENU

If the display is in standby, unlock it:

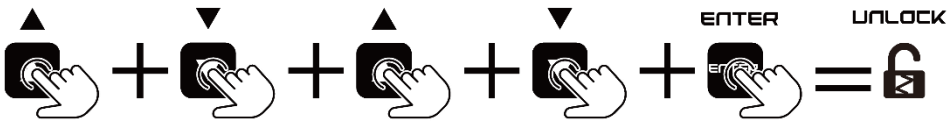

MENU			DESCRIPTION
DMX ADDR		001-512	DMX address setting
CHANNEL		6 channels	DMX channel mode
		8 channels	
		10 channels	
		11 channels	
DIMMER CURVE		Dim curve 1	Select dimmer curve
		Dim curve 2	
		Dim curve 3	
		Dim curve 4	
DMX STATE		Blackout/Hold	Select DMX status when signal lost.
STATIC COLOUR		01-32	Static colour
JUMP MODE		1-09	Speed from slow to fast
FADE MODE		1-09	Speed from slow to fast
PULSE MODE		1-09	Speed from slow to fast
SOUND MODE	Sub Mode	1-04	Sound mode 1-4
	Sensitivity	1-09	Adjust sensitivity
MANUAL MODE	Red	000-255	Dimmer Red
	Green	000-255	Dimmer Green
	Blue	000-255	Dimmer Blue
	White	000-255	Dimmer White
	Amber	000-255	Dimmer Amber
	UV	000-255	Dimmer UV
	Shutter	000-009	Speed from slow to fast
SET UP	Key Lock	OFF/ON	Enable/disable button lock function
	Remote	OFF/ON	Enable/disable infrared remote function
	Display	10s/20s/30S/ Always ON	Display standby time
	Reset	YES/NO	Reset system
INFORMATION	Model	BAC series	Product model
	Colour	RGBXXX	LED mix colour
	Software	V0.01	Software version
	Hardware	QY-XXX	Hardware version
	Work Time	xxxx.xH	Current running time
	Total Time	xxxx.xH	Total running time

DMX CHANNELS

6 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	RED	000-255	Dimmer Red 0-100%
2	GREEN	000-255	Dimmer Green 0-100%
3	BLUE	000-255	Dimmer Blue 0-100%
4	WHITE	000-255	Dimmer White 0-100%
5	AMBER	000-255	Dimmer Amber 0-100%
6	UV	000-255	Dimmer UV 0-100%

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	WHITE	000-255	Dimmer White 0-100%
6	AMBER	000-255	Dimmer Amber 0-100%
7	UV	000-255	Dimmer UV 0-100%
8	STROBE	000-009	No Function
		010-255	Strobe from slow to fast

10 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	WHITE	000-255	Dimmer White 0-100%
6	AMBER	000-255	Dimmer Amber 0-100%
7	UV	000-255	Dimmer UV 0-100%
8	STROBE	000-009	No Function
		010-255	Strobe from slow to to fast
9	MODE	000-020	No function
		021-050	Static colour (colour is controlled by CH8)
		051-080	Jump mode
		081-110	Fade mode
		111-140	Pulse mode
		141-170	Sound mode 1
		171-200	Sound mode 2
		201-230	Sound mode 3
		231-255	Sound mode 4
10	CONTROLE MODE	000-255	Speed from slow to fast (CH7=051~140)
		000-255	Static colour as form-1 (CH7=021~050)
		000-255	Sensitive (CH7=141~255)

11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	WHITE	000-255	Dimmer White 0-100%
6	AMBER	000-255	Dimmer Amber 0-100%
7	UV	000-255	Dimmer UV 0-100%
8	STROBE	000-009	No Function
		010-255	Strobe from slow to to fast
9	MODE	000-020	No function
		021-050	Static colour (colour is controlled by CH8)
		051-080	Jump mode
		081-110	Fade mode
		111-140	Pulse mode
		141-170	Sound mode 1
		171-200	Sound mode 2
		201-230	Sound mode 3
		231-255	Sound mode 4
10	CONTROLE MODE	000-255	Speed from slow to fast (CH7=051~140)
		000-255	Static colour as form-1 (CH7=021~050)
		000-255	Sensitive (CH7=141~255)
11	DIMMING CURVE	000-063	No Function
		000-063	Dimmer curve 1
		064-127	Dimmer curve 2
		128-191	Dimmer curve 3
		192-255	Dimmer curve 4

*When Channel 7 is on:

VALUE	DESCRIPTION	VALUE	DESCRIPTION
000-007	Static colour 1	128-135	Static colour 17
008-015	Static colour 2	136-143	Static colour 18
016-023	Static colour 3	144-151	Static colour 19
024-031	Static colour 4	152-159	Static colour 20
032-039	Static colour 5	160-167	Static colour 21
040-047	Static colour 6	168-175	Static colour 22
048-055	Static colour 7	176-183	Static colour 23
056-063	Static colour 8	184-191	Static colour 24
064-071	Static colour 9	192-199	Static colour 25
072-079	Static colour 10	200-207	Static colour 26
080-087	Static colour 11	208-215	Static colour 27
088-095	Static colour 12	216-223	Static colour 28
096-103	Static colour 13	224-231	Static colour 29
104-111	Static colour 14	232-239	Static colour 30
112-119	Static colour 15	240-247	Static colour 31
120-127	Static colour 16	248-255	Static colour 32

BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT

beamZ Pro

offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!

BEAMZLIGHTING.COM

SoundSak

Universal Gear Sack

MPN: GEARSAK

EAN: 5056141357386

Carry bag for smoke machines, snow machines, mixers and DJ gear
Strong and durable PVC construction with splashproof coating
Stitched carry handle and large front opening with dual zips
Internal dimensions of 410 x 280 x 180mm suitable for most smoke machines, snow machines and mixers

Introducing GearSak, the universally fitting, carry bag that takes care of your cables, smoke machines, snow machines, small mixers and general equipment's transportation needs, with no fuss or frills- just as you need it - when you need it.

The perfect solution for all mobile DJ's, bands, and live performance artists and all in general.

Features

Tough PVC Material
Stitched Carry Handle
Universal Speaker Fitting
Holds All Kinds of Equipment

Specifications

Internal Dimensions: 410 x 280 x 180mm
MPN: GEARSAK