




ACTIVAR SU INTERFAZ LIGHT RIDER / ESA2 DMX

Su BeamZ interfaz DMX debe ser activada antes de empezar con su uso en ESA2 o Light Rider.
Se requiere de conexión a internet.

PASO UNO

DESCARGUE E INSTALE LA ÚLTIMA VERSIÓN DEL SOFTWARE ESA2 BEAMZ

La última versión la puede encontrar en www.dmxsoft.com

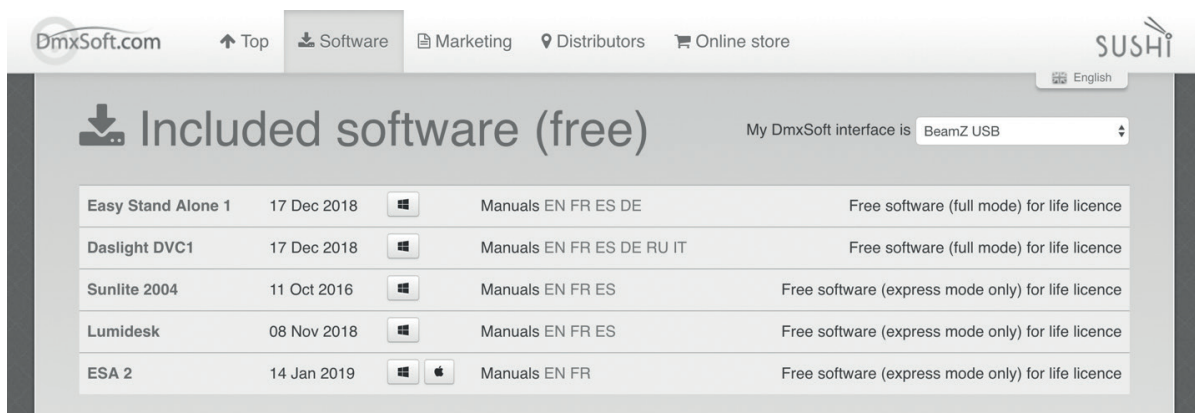

PASO DOS

CONECTE SU INTERFAZ BEAMZ DMX A SU ORDENADOR Y ARRANQUE EL PROGRAMA

PASO TRES

INTRODUZCA LOS DATOS DE SU CUENTA

Su interfaz DMX debe estar linkeada con su cuenta DMXsoft.

Si no tiene una cuenta, puede crearla en store.dmxsoft.com

PASO CUATRO

INTRODUZCA SU CLAVE DE PRODUCTO DE 20 DÍGITOS

La encontrará en el dorso de la tarjeta de plástico BeamZ suministrada con la interfaz DMX.

MÁS CANALES? NUEVO SOFTWARE?

Actualice a una nueva versión o cargue su interfaz
BeamZ DMX con canales extra.

Visite www.dmxsoft.com





EMPEZANDO A USAR LIGHT RIDER

PASO UNO

Descargue la app de LIGHT RIDER desde **Apple App Store**, **Amazon App Store** o **Google Play Store**

PASO DOS

Conecte su interfaz DMX a una toma de alimentación USB de 5V usando el cable suministrado tipo C.

PASO TRES

Vaya a la configuración de wifi de su terminal y seleccione la red que se denominará **"SMART DMX INTERFACE XXXXX"** donde las X pertenecen a su número de serie.
La contraseña por defecto para el emparejamiento es: **00000000**

PASO CUATRO

Los ajustes wifi pueden configurarse usando el
HARDWARE MANAGER disponible en la página **www.lightriderapp.com**

VISITE WWW.LIGHTRIDERAPP.COM DONDE PODRÁ:

- Añadir más canales a su interfaz BeamZ DMX
- Añadir más programas para su interfaz BeamZ DMX
 - Descargar el manual de la app completo
 - Descargar el datasheet
 - Ver video tutoriales



BEAMZ
MADE
EAZY

150.354 V1

FUZE 1910

QUICK START GUIDE

CONTROL MENU

MENU			DESCRIPTION
DMX ADDR	A000-Axxx		DMX address setting
AUTO PLAY	Auto run	Internal program 1-9	Auto program
	Music Run	Internal program 1-9	Sound control
RESET	ALL	On / Off	Reset all
	Pan /Tilt	On / Off	Reset Pan /Tilt
REVERS PAN	On / Off		Reverse Pan
REVERS TILT	On / Off		Reverse Tilt
SPECIAL	Reset default	On / Off	Reset default
	Calibrate		Access for Beamz authorised dealer only
	Temperature	xxx °C / F	Current temperature
	Manual Ctrl	PAN = xxx	Manual control
	Mic SET	0-99%	Sensitivity of microphone
DMX MODE	CH 16		Standard mode
	CH 28		Basic mode
SCAN DEGREE	PAN	630° / 540° / 360°	Select TILT Degree, default is 540°
	TILT	270° / 180° / 90°	Select PAN Degree, default is 270°
VERSION	Vx.xx		Software version

DMX CHANNELS

16CH	28CH	FUNCTION	VALUE	DESCRIPTION
1	1	Master dimmer	000-255	Dimmer 0-100%
2	2	Shutter	000-031	No function
			032-063	Open
			064-095	Strobe, slow to fast
			096-127	Open
			128-159	Pulse effect in sequences slow to fast
			160-191	Open
			192-223	Random strobe effect slow to fast
			224-255	Open
3	3	Pan	000-255	Movement 0°-540°
4	4	Pan Fine	000-255	
5	5	Tilt	000-255	Movement 0°-270°
6	6	Tilt Fine	000-255	
7	7	P/T Speed	000-225	Slow to fast
			226-235	Blackout by movement
			236-255	No function
8	8	Colour	000-255	Red dimmer 0-100%
9	9		000-255	Green dimmer 0-100%
10	10		000-255	Blue dimmer 0-100%
11	11		000-255	White dimmer 0-100%
	12	LED Ring 1	000-255	Red dimmer 0-100%
	13		000-255	Green dimmer 0-100%
	14		000-255	Blue dimmer 0-100%
	15		000-255	White dimmer 0-100%
	16	LED Ring 2	000-255	Red dimmer 0-100%
	17		000-255	Green dimmer 0-100%
	18		000-255	Blue dimmer 0-100%
	19		000-255	White dimmer 0-100%

16CH	28CH	FUNCTION	VALUE	DESCRIPTION
	20	LED Ring 3	000-255	Red dimmer 0-100%
	21		000-255	Green dimmer 0-100%
	22		000-255	Blue dimmer 0-100%
	23		000-255	White dimmer 0-100%
	24	Macro colour	000-015	No function
			016-031	Red
			032-047	Green
			048-063	Blue
			064-079	White
			080-095	Red + green
			096-111	Red + blue
			112-127	Red + white
			128-143	Green + blue
			144-159	Green + white
			160-175	Blue + white
			176-191	Red + green + blue
			192-207	Red + green + blue + white
			208-212	2700K
			213-217	3200K
			218-222	3500K
			223-227	5000K
			228-232	5500K
			233-237	6000K
			238-242	6500K
			243-247	7000K
			248-255	8000K
13	25	Colour temperature	000-015	No function
			016-045	Below 3200K
			046-075	3200K-3500K
			076-105	3500K-5000K
			106-135	5000K-5500K
			136-165	5500K-6000K
			166-195	6000K-6500K
			196-225	6500K-7000K
			226-255	7000K-8000K
14	26	Macro	000-015	No function
			016-031	Macro run 1
				
			128-143	Macro run 8
			144-159	Macro sound 1
				
			240-255	Macro sound 7
15	27	Marco speed	000-255	Macro speed, from slow to fast
16	28	Special	000-079	No function
			080-094	Reset motors
			095-099	No function
			100-119	Internal program 1
				
			220-239	Internal program 7
			240-255	Internal sound program 1



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



BEAMZLIGHTING.COM



177.906 **RL CONNEX**

CX100-6 DMX Cable XLR Male - XLR Female 6m

PD Connex professional HQ 6 meter DMX signal cable. This flexible signal cable is fitted with high quality XLR connectors and guarantees a trouble-free and reliable DMX signal transmission. Supplied including cable tie.

IP rating : N/A

Select both plugs : 3-pin XLR (M), 3-pin XLR (F)

Lead length : 6m

Conductor : 28x0.1mm

Outer diameter : 6mm

Shielding : 60x0.1mm

Impedance : 120 Ohm

Weight (kg) : 0,30

- Professional flexible cable
- High quality metal connectors
- Cable tie included
- Various lengths available