



**BEAMZ**  
**MADE**  
**EAZY**

150.354 V1

**FUZE 1910**

**QUICK START GUIDE**

## CONTROL MENU

| MENU               |               |                      | DESCRIPTION                             |
|--------------------|---------------|----------------------|-----------------------------------------|
| <b>DMX ADDR</b>    | A000-Axxx     |                      | DMX address setting                     |
| <b>AUTO PLAY</b>   | Auto run      | Internal program 1-9 | Auto program                            |
|                    | Music Run     | Internal program 1-9 | Sound control                           |
| <b>RESET</b>       | ALL           | On / Off             | Reset all                               |
|                    | Pan /Tilt     | On / Off             | Reset Pan /Tilt                         |
| <b>REVERS PAN</b>  | On / Off      |                      | Reverse Pan                             |
| <b>REVERS TILT</b> | On / Off      |                      | Reverse Tilt                            |
| <b>SPECIAL</b>     | Reset default | On / Off             | Reset default                           |
|                    | Calibrate     |                      | Access for Beamz authorised dealer only |
|                    | Temperature   | xxx °C / F           | Current temperature                     |
|                    | Manual Ctrl   | PAN = xxx            | Manual control                          |
|                    | Mic SET       | 0-99%                | Sensitivity of microphone               |
| <b>DMX MODE</b>    | CH 16         |                      | Standard mode                           |
|                    | CH 28         |                      | Basic mode                              |
| <b>SCAN DEGREE</b> | PAN           | 630° / 540° / 360°   | Select TILT Degree, default is 540°     |
|                    | TILT          | 270° / 180° / 90°    | Select PAN Degree, default is 270°      |
| <b>VERSION</b>     | Vx.xx         |                      | Software version                        |

## DMX CHANNELS

| 16CH | 28CH | FUNCTION      | VALUE   | DESCRIPTION                            |
|------|------|---------------|---------|----------------------------------------|
| 1    | 1    | Master dimmer | 000-255 | Dimmer 0-100%                          |
| 2    | 2    | Shutter       | 000-031 | No function                            |
|      |      |               | 032-063 | Open                                   |
|      |      |               | 064-095 | Strobe, slow to fast                   |
|      |      |               | 096-127 | Open                                   |
|      |      |               | 128-159 | Pulse effect in sequences slow to fast |
|      |      |               | 160-191 | Open                                   |
|      |      |               | 192-223 | Random strobe effect slow to fast      |
|      |      |               | 224-255 | Open                                   |
| 3    | 3    | Pan           | 000-255 | Movement 0°-540°                       |
| 4    | 4    | Pan Fine      | 000-255 |                                        |
| 5    | 5    | Tilt          | 000-255 | Movement 0°-270°                       |
| 6    | 6    | Tilt Fine     | 000-255 |                                        |
| 7    | 7    | P/T Speed     | 000-225 | Slow to fast                           |
|      |      |               | 226-235 | Blackout by movement                   |
|      |      |               | 236-255 | No function                            |
| 8    | 8    | Colour        | 000-255 | Red dimmer 0-100%                      |
| 9    | 9    |               | 000-255 | Green dimmer 0-100%                    |
| 10   | 10   |               | 000-255 | Blue dimmer 0-100%                     |
| 11   | 11   |               | 000-255 | White dimmer 0-100%                    |
|      | 12   | LED Ring 1    | 000-255 | Red dimmer 0-100%                      |
|      | 13   |               | 000-255 | Green dimmer 0-100%                    |
|      | 14   |               | 000-255 | Blue dimmer 0-100%                     |
|      | 15   |               | 000-255 | White dimmer 0-100%                    |
|      | 16   | LED Ring 2    | 000-255 | Red dimmer 0-100%                      |
|      | 17   |               | 000-255 | Green dimmer 0-100%                    |
|      | 18   |               | 000-255 | Blue dimmer 0-100%                     |
|      | 19   |               | 000-255 | White dimmer 0-100%                    |

| 16CH | 28CH | FUNCTION           | VALUE   | DESCRIPTION                    |
|------|------|--------------------|---------|--------------------------------|
|      | 20   | LED Ring 3         | 000-255 | Red dimmer 0-100%              |
|      | 21   |                    | 000-255 | Green dimmer 0-100%            |
|      | 22   |                    | 000-255 | Blue dimmer 0-100%             |
|      | 23   |                    | 000-255 | White dimmer 0-100%            |
|      | 24   | Macro colour       | 000-015 | No function                    |
|      |      |                    | 016-031 | Red                            |
|      |      |                    | 032-047 | Green                          |
|      |      |                    | 048-063 | Blue                           |
|      |      |                    | 064-079 | White                          |
|      |      |                    | 080-095 | Red + green                    |
|      |      |                    | 096-111 | Red + blue                     |
|      |      |                    | 112-127 | Red + white                    |
|      |      |                    | 128-143 | Green + blue                   |
|      |      |                    | 144-159 | Green + white                  |
|      |      |                    | 160-175 | Blue + white                   |
|      |      |                    | 176-191 | Red + green + blue             |
|      |      |                    | 192-207 | Red + green + blue + white     |
|      |      |                    | 208-212 | 2700K                          |
|      |      |                    | 213-217 | 3200K                          |
|      |      |                    | 218-222 | 3500K                          |
|      |      |                    | 223-227 | 5000K                          |
|      |      |                    | 228-232 | 5500K                          |
|      |      |                    | 233-237 | 6000K                          |
|      |      |                    | 238-242 | 6500K                          |
|      |      |                    | 243-247 | 7000K                          |
|      |      |                    | 248-255 | 8000K                          |
| 13   | 25   | Colour temperature | 000-015 | No function                    |
|      |      |                    | 016-045 | Below 3200K                    |
|      |      |                    | 046-075 | 3200K-3500K                    |
|      |      |                    | 076-105 | 3500K-5000K                    |
|      |      |                    | 106-135 | 5000K-5500K                    |
|      |      |                    | 136-165 | 5500K-6000K                    |
|      |      |                    | 166-195 | 6000K-6500K                    |
|      |      |                    | 196-225 | 6500K-7000K                    |
|      |      |                    | 226-255 | 7000K-8000K                    |
| 14   | 26   | Macro              | 000-015 | No function                    |
|      |      |                    | 016-031 | Macro run 1                    |
|      |      |                    | ....    | ....                           |
|      |      |                    | 128-143 | Macro run 8                    |
|      |      |                    | 144-159 | Macro sound 1                  |
|      |      |                    | ....    | ....                           |
|      |      |                    | 240-255 | Macro sound 7                  |
| 15   | 27   | Marco speed        | 000-255 | Macro speed, from slow to fast |
| 16   | 28   | Special            | 000-079 | No function                    |
|      |      |                    | 080-094 | Reset motors                   |
|      |      |                    | 095-099 | No function                    |
|      |      |                    | 100-119 | Internal program 1             |
|      |      |                    | ....    | ....                           |
|      |      |                    | 220-239 | Internal program 7             |
|      |      |                    | 240-255 | Internal sound program 1       |



# BEAMZ

**YOUR FUTURE**  
**YOUR SKILLS**  
**YOUR PLATFORM**  
**YOUR PARTY**  
**YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.




**BEAMZLIGHTING.COM**









## **DJP165 DJ Plinth**

Ref. nr.: 180.080

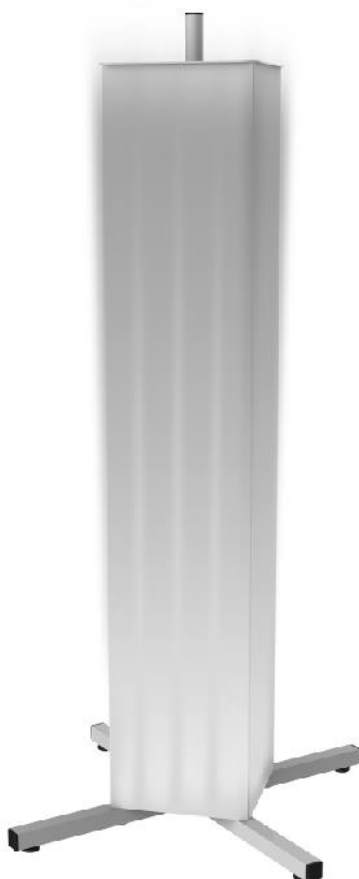


INSTRUCTION MANUAL  
GEBRUIKSAANWIJZING  
GEBRAUCHSANLEITUNG  
MANUAL DE INSTRUCCIONES  
MANUEL D'INSTRUCTIONS  
INSTRUKCJA OBSŁUGI

## ASSEMBLE

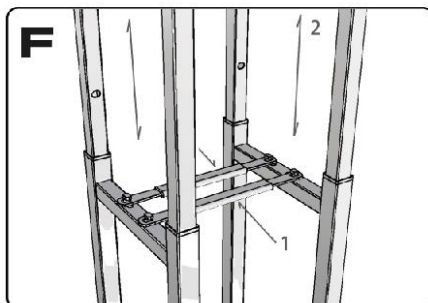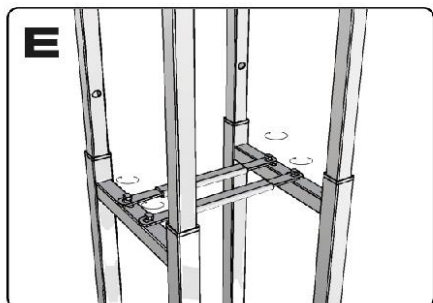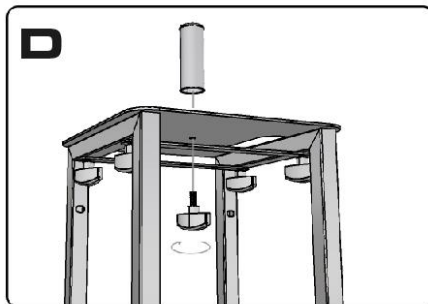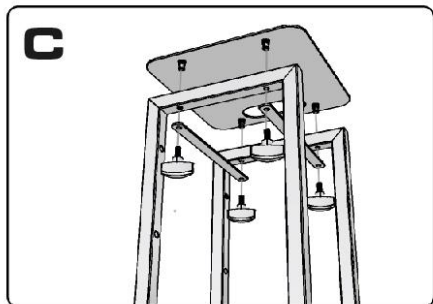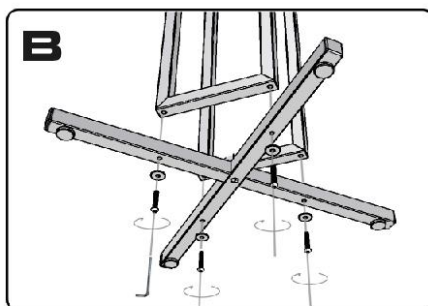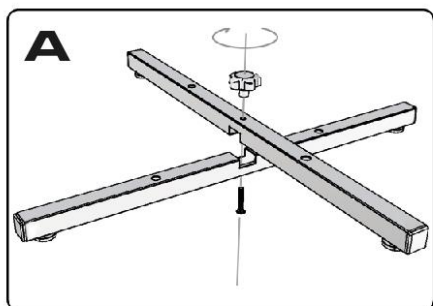

↓ **MAX LOAD**  
**KG 30KG**

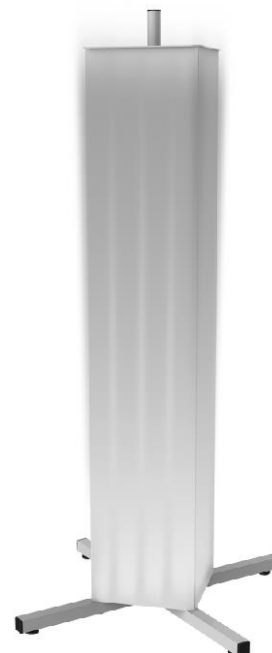

## TECHNICAL SPECIFICATION / TECHNISCHE SPECIFICATIE / TECHNISCHE DATEN / ESPECIFICACIONES TÉCNICAS / SPÉCIFICATIONS TECHNIQUES / SPECYFIKACJA TECHNICZNA

Material: Metal  
Dimension:  
Folded 115 x 31 x 10cm  
Min height 100cm  
Max height 180cm  
Max. weight load: 30kg  
Weight: 8.5kg

The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

Specifications and design are subject to change without prior notice..

[www.tronios.com](http://www.tronios.com)

Copyright © 2020 by TRONIOS the Netherlands



177.906 **RL CONNEX**

## CX100-6 DMX Cable XLR Male - XLR Female 6m

PD Connex professional HQ 6 meter DMX signal cable. This flexible signal cable is fitted with high quality XLR connectors and guarantees a trouble-free and reliable DMX signal transmission. Supplied including cable tie.

IP rating : N/A  
Select both plugs : 3-pin XLR (M), 3-pin XLR (F)  
Lead length : 6m  
Conductor : 28x0.1mm  
Outer diameter : 6mm  
Shielding : 60x0.1mm  
Impedance : 120 Ohm  
Weight (kg) : 0,30

- Professional flexible cable
- High quality metal connectors
- Cable tie included
- Various lengths available