



BEAMZ
MADE
EAZY

150.350 V1

FUZE 2812

QUICK START GUIDE

CONTROL MENU

MENU			DESCRIPTION
DMX ADDR	A000-Axxx		DMX address setting
AUTO PLAY	Auto run	Internal program 1-9	Auto program
	Music Run	Internal program 1-9	Sound control
RESET	ALL	On / Off	Reset all
	Pan /Tilt	On / Off	Reset Pan /Tilt
	Zoom	On / Off	Reset zoom
REVERS PAN	On / Off		Reverse Pan
REVERS TILT	On / Off		Reverse Tilt
SPECIAL	Reset default	On / Off	Reset default
	Calibrate		Access for Beamz authorised dealer only
	Temperature	xxx °C / F	Current temperature
	Manual Ctrl	PAN = xxx	Manual control
	Mic SET	0-99%	Sensitivity of mic
	Work time	xxxh	Work time
DMX MODE	CH 45		Standard mode
	CH 21		Basic mode
SCAN DEGREE	PAN	630° / 540° / 360°	Select TILT Degree, default is 540°
	TILT	270° / 180° / 90°	Select PAN Degree, default is 270°
VERSION	Vx.xx		Software version

DMX CHANNELS

21CH	45CH	FUNCTION	VALUE	DESCRIPTION
1	1	Dimmer	000-255	Intensity 0-100%
2	2	Shutter	000-031	No function
			032-063	Open
			064-095	Strobe, slow to fast
			096-127	Open
			128-159	Pulse effect in sequences slow to fast
			160-191	Open
			192-223	Random strobe effect slow to fast
			224-255	Open
3	3	Pan	000-255	Movement 0°-540°
4	4	Pan Fine	000-255	
5	5	Tilt	000-255	Movement 0°-270°
6	6	Tilt Fine	000-255	
7	7	P/T Speed	000-225	Fast to slow
			226-235	Blackout by movement
			236-255	No function
8	8	Colour	000-255	Red 0-100% dimmer, from dark to bright
9	9		000-255	Green 0-100% dimmer, from dark to bright
10	10		000-255	Blue 0-100% dimmer, from dark to bright
11	11		000-255	White 0-100% dimmer, from dark to bright
12	12		000-255	Amber 0-100% dimmer, from dark to bright
13	13		000-255	UV 0-100% dimmer, from dark to bright
14	14	Zoom	000-255	In(near) to out(far)
	15 / 20	Section 1	000-255	Colour of each section see "Colour" channels
	21 / 26	Section 2	000-255	
	27 / 32	Section 3	000-255	
	33 / 38	Section 4	000-255	

21CH	45CH	FUNCTION	VALUE	DESCRIPTION
15	39	Macro colour	000-015	No function
			016-031	Red
			032-047	Green
			048-063	Blue
			064-079	White
			080-095	Red + green
			096-111	Red + blue
			112-127	Red + white
			128-143	Green + blue
			144-159	Green + white
			160-175	Blue + white
			176-191	Red + green + blue
			192-207	Red + green + blue + white
			208-212	2700K
			213-217	3200K
			218-222	3500K
			223-227	5000K
			228-232	5500K
			233-237	6000K
			238-242	6500K
			243-247	7000K
			248-255	8000K
16	40	Colour temperature	000-015	No function
			016-045	Below 3200K
			046-075	3200K - 3500K
			076-105	3500K - 5000K
			106-135	5000K - 5500K
			136-165	5500K - 6000K
			166-195	6000K - 6500K
			196-225	6500K - 7000K
			226-255	7000K - 8000K
			17	41
016-031	Macro run 1			
.....				
128-143	Macro run 8			
144-159	Macro sound 1			
.....				
240-255	Macro sound 7			
18	42	Macro Speed	000-255	Macro speed from slow to fast
19	43	Dynamic Rotate	000-015	No function
			016-031	Dynamic rotate 1
				
			240-255	Dynamic rotate 15
20	44	Dynamic rotate Speed	000-255	From slow to fast
21	45	Special	000-079	No function
			080-084	Motor reset
			095-099	Zoom motor reset
			100-119	Internal program 1
				
			220-239	Internal program 7
			240-255	Internal Sound program 1



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.




BEAMZLIGHTING.COM









DJP165 DJ Plinth

Ref. nr.: 180.080

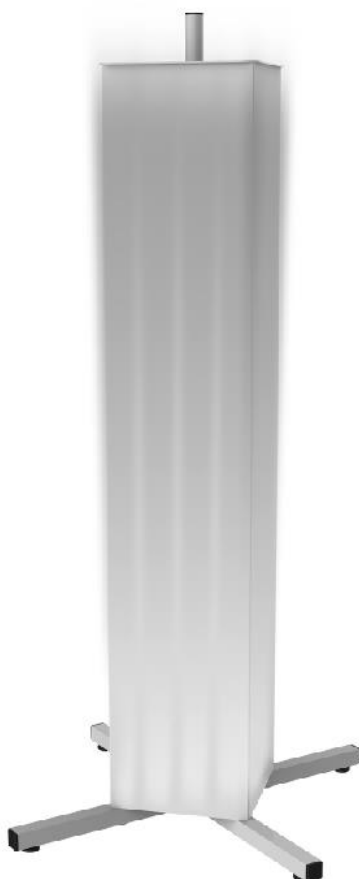


INSTRUCTION MANUAL
GEBRUIKSAANWIJZING
GEBRAUCHSANLEITUNG
MANUAL DE INSTRUCCIONES
MANUEL D'INSTRUCTIONS
INSTRUKCJA OBSŁUGI

ASSEMBLE

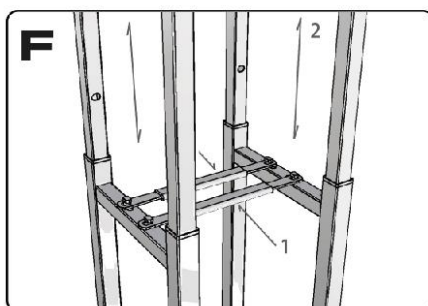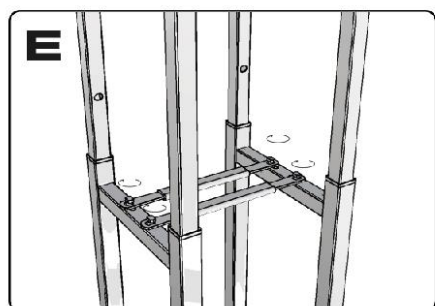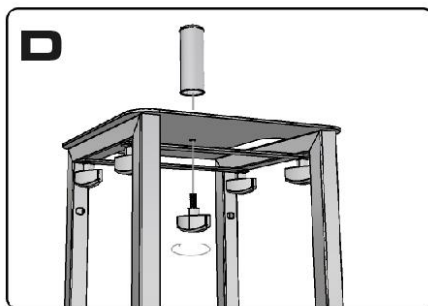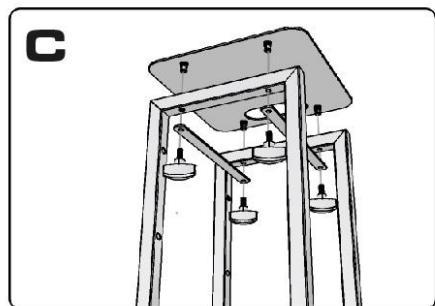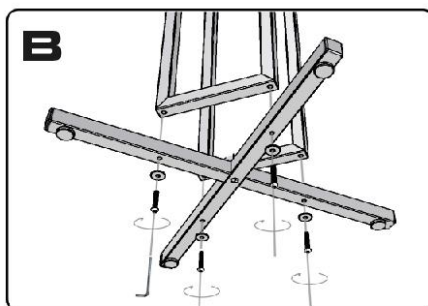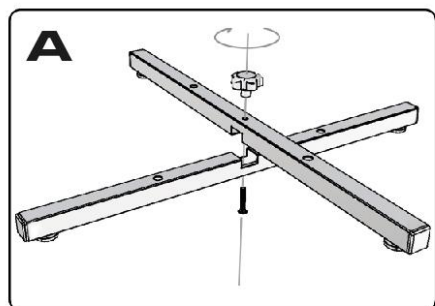

↓ **MAX LOAD**
KG 30KG

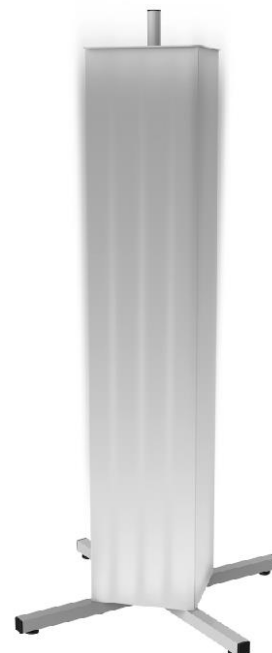

TECHNICAL SPECIFICATION / TECHNISCHE SPECIFICATIE / TECHNISCHE DATEN / ESPECIFICACIONES TÉCNICAS / SPÉCIFICATIONS TECHNIQUES / SPECYFIKACJA TECHNICZNA

Material: Metal
Dimension:
Folded 115 x 31 x 10cm
Min height 100cm
Max height 180cm
Max. weight load: 30kg
Weight: 8.5kg

The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

Specifications and design are subject to change without prior notice..

www.tronios.com

Copyright © 2020 by TRONIOS the Netherlands



177.906 **RL CONNEX**

CX100-6 DMX Cable XLR Male - XLR Female 6m

PD Connex professional HQ 6 meter DMX signal cable. This flexible signal cable is fitted with high quality XLR connectors and guarantees a trouble-free and reliable DMX signal transmission. Supplied including cable tie.

IP rating : N/A

Select both plugs : 3-pin XLR (M), 3-pin XLR (F)

Lead length : 6m

Conductor : 28x0.1mm

Outer diameter : 6mm

Shielding : 60x0.1mm

Impedance : 120 Ohm

Weight (kg) : 0,30

- Professional flexible cable
- High quality metal connectors
- Cable tie included
- Various lengths available