



**BEAMZ**  
**MADE**  
**EAZY**

150.581 150.588 V1.0

**BBP90**

**QUICK START GUIDE**


## CONTROL MENU

| MENU  |         | DESCRIPTION                                    |
|-------|---------|------------------------------------------------|
| A001  | 001-512 | DMX address setting                            |
| U_100 | 000-100 | Battery level indicator                        |
| IRYE  | yE      | Turn on the remote control function            |
|       | no      | Turn off the remote control function           |
| 0255  | 000-255 | Master dimmer 0-100%                           |
| R255  | 000-255 | Red dimmer 0-100%                              |
| G255  | 000-255 | Green dimmer 0-100%                            |
| B255  | 000-255 | Blue dimmer 0-100%                             |
| U255  | 000-255 | UV dimmer 0-100%                               |
| F255  | 010-255 | Strobe speed from slow to fast                 |
| CL01  | 01-08   | Static colour selectable                       |
| CC01  | 00-99   | Colour jumping                                 |
| DE01  | 00-99   | Colour gradual change, speed from slow to fast |
| CP01  | 00-99   | Colour pulse change, speed from slow to fast   |
| SUN9  | 0-9     | Sound control, sensitivity from high to low    |



## DMX CHANNELS

| CHANNEL | FUNCTION      | VALUE   | DESCRIPTION                       |
|---------|---------------|---------|-----------------------------------|
| 1       | Master dimmer | 000-255 | Dim all, From dark to bright      |
| 2       | Colour        | 000-255 | Red 0-100%, from dark to bright   |
| 3       |               | 000-255 | Green 0-100%, from dark to bright |
| 4       |               | 000-255 | Blue 0-100%, from dark to bright  |
| 5       |               | 000-255 | UV 0-100%, from dark to bright    |
| 6       | Strobe        | 000-009 | No function                       |
|         |               | 010-255 | Strobe from slow to fast          |
| 7       | Function      | 000-050 | No function                       |
|         |               | 051-100 | 8 kinds of colour output          |
|         |               | 101-150 | Colour jumping                    |
|         |               | 151-200 | Colour gradual change             |
|         |               | 201-250 | Colour pulse change               |
|         |               | 251-255 | Sound control                     |

# RJ45 TO DMX CABLE



RJ45

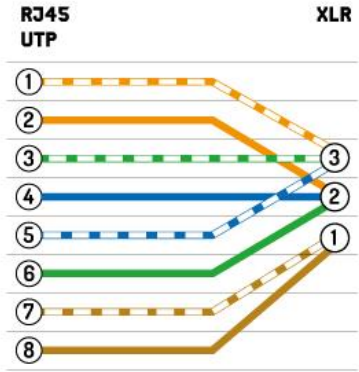



# BEAMZ

**YOUR FUTURE**  
**YOUR SKILLS**  
**YOUR PLATFORM**  
**YOUR PARTY**  
**YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



**BEAMZLIGHTING.COM**