



BEAMZ
MADE
EAZY

151.306 & 151.313 V2.0

BT270 & BT310

QUICK START GUIDE

CONTROL MENU

MENU		DESCRIPTION
DMX Mode	8 Ch	DMX address 8 channels
	4-1 Ch	DMX address 4 channels
	4 Ch	DMX address 4 channels
	3 Ch	DMX address 3 channels
	2 Ch	DMX address 2 channels
Static colours	S01-17	Static colours
Auto	Au 1-2	Auto program
Sound	So 1-2	Sound program
Speed	SP 1-9	Speed
Mic Sensitivity	SE 1-9	Mic sensitivity
Edit colour	R000-255	Red (0-100%)
	G000-255	Green (0-100%)
	B000-255	Blue (0-100%)
	U000-255	White (0-100%)
Dimming	D11- d19	Master dimming
Silent scene	On/Off	Silent scene by sound program
Slave	Slave	Slave function
Infrared	On/Off	Enable or disenable IR remote

DMX CHANNELS

2 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimming all LED 0-100%
2	Static colour	000-009	No function
		010-019	Red
		020-029	Green
		030-039	Blue
		040-049	White
		050-059	Yellow
		060-069	Magenta
		070-079	Cyan
		080-089	Dark orange
		090-099	Green yellow
		100-109	Salmon
		110-119	Turquoise
		120-129	Light Green
		130-139	Orange
		140-149	Lavender
		150-159	Light blue
		160-169	Dark blue
		170-255	Pink

3 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Colour	000-255	Red 0-100%
2		000-255	Green 0-100%
3		000-255	Blue 0-100%

4 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Colour	000-255	Red 0-100%
2		000-255	Green 0-100%
3		000-255	Blue 0-100%
4		000-255	White 0-100%

4-1 CHANNELS


CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimming all LED 0-100%
2	Strobe	000-255	Stroboscope (Slow to fast)
3	Static colour	000-009	No function
		010-019	Red
		020-029	Green
		030-039	Blue
		040-049	White
		050-059	Yellow
		060-069	Magenta
		070-079	Cyan
		080-089	Dark orange
		090-099	Green yellow
		100-109	Salmon
		110-119	Turquoise
		120-129	Light Green
		130-139	Orange
		140-149	Lavender
		150-159	Light blue
		160-169	Dark blue
		170-255	Pink
4	Auto/ sound	000-009	No function
		010-069	Auto Color blending (rate)
		070-129	Auto Color change (rate)
		130-189	Sound color blending (rate)
		190-255	Sound color change (rate)

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimming all LED 0-100%
2	Strobe	000-255	Stroboscope (Slow to fast)
3	Colour	000-255	Red 0-100%
4		000-255	Green 0-100%
5		000-255	Blue 0-100%
6		000-255	White 0-100%
7		000-009	No function
	Static colour	010-019	Red
		020-029	Green
		030-039	Blue
		040-049	White
		050-059	Yellow
		060-069	Magenta
		070-079	Cyan
		080-089	Dark orange
		090-099	Green yellow
		100-109	Salmon
		110-119	Turquoise
		120-129	Light Green
		130-139	Orange
		140-149	Lavender
		150-159	Light blue
		160-169	Dark blue
		170-255	Pink
8	Colour macro	000-009	No function
		010-069	Auto Colour blending (rate)
		070-129	Auto Colour change (rate)
		130-189	Sound colour blending (rate)
		190-255	Sound colour change (rate)



Handwriting practice lines consisting of 20 horizontal dotted lines.

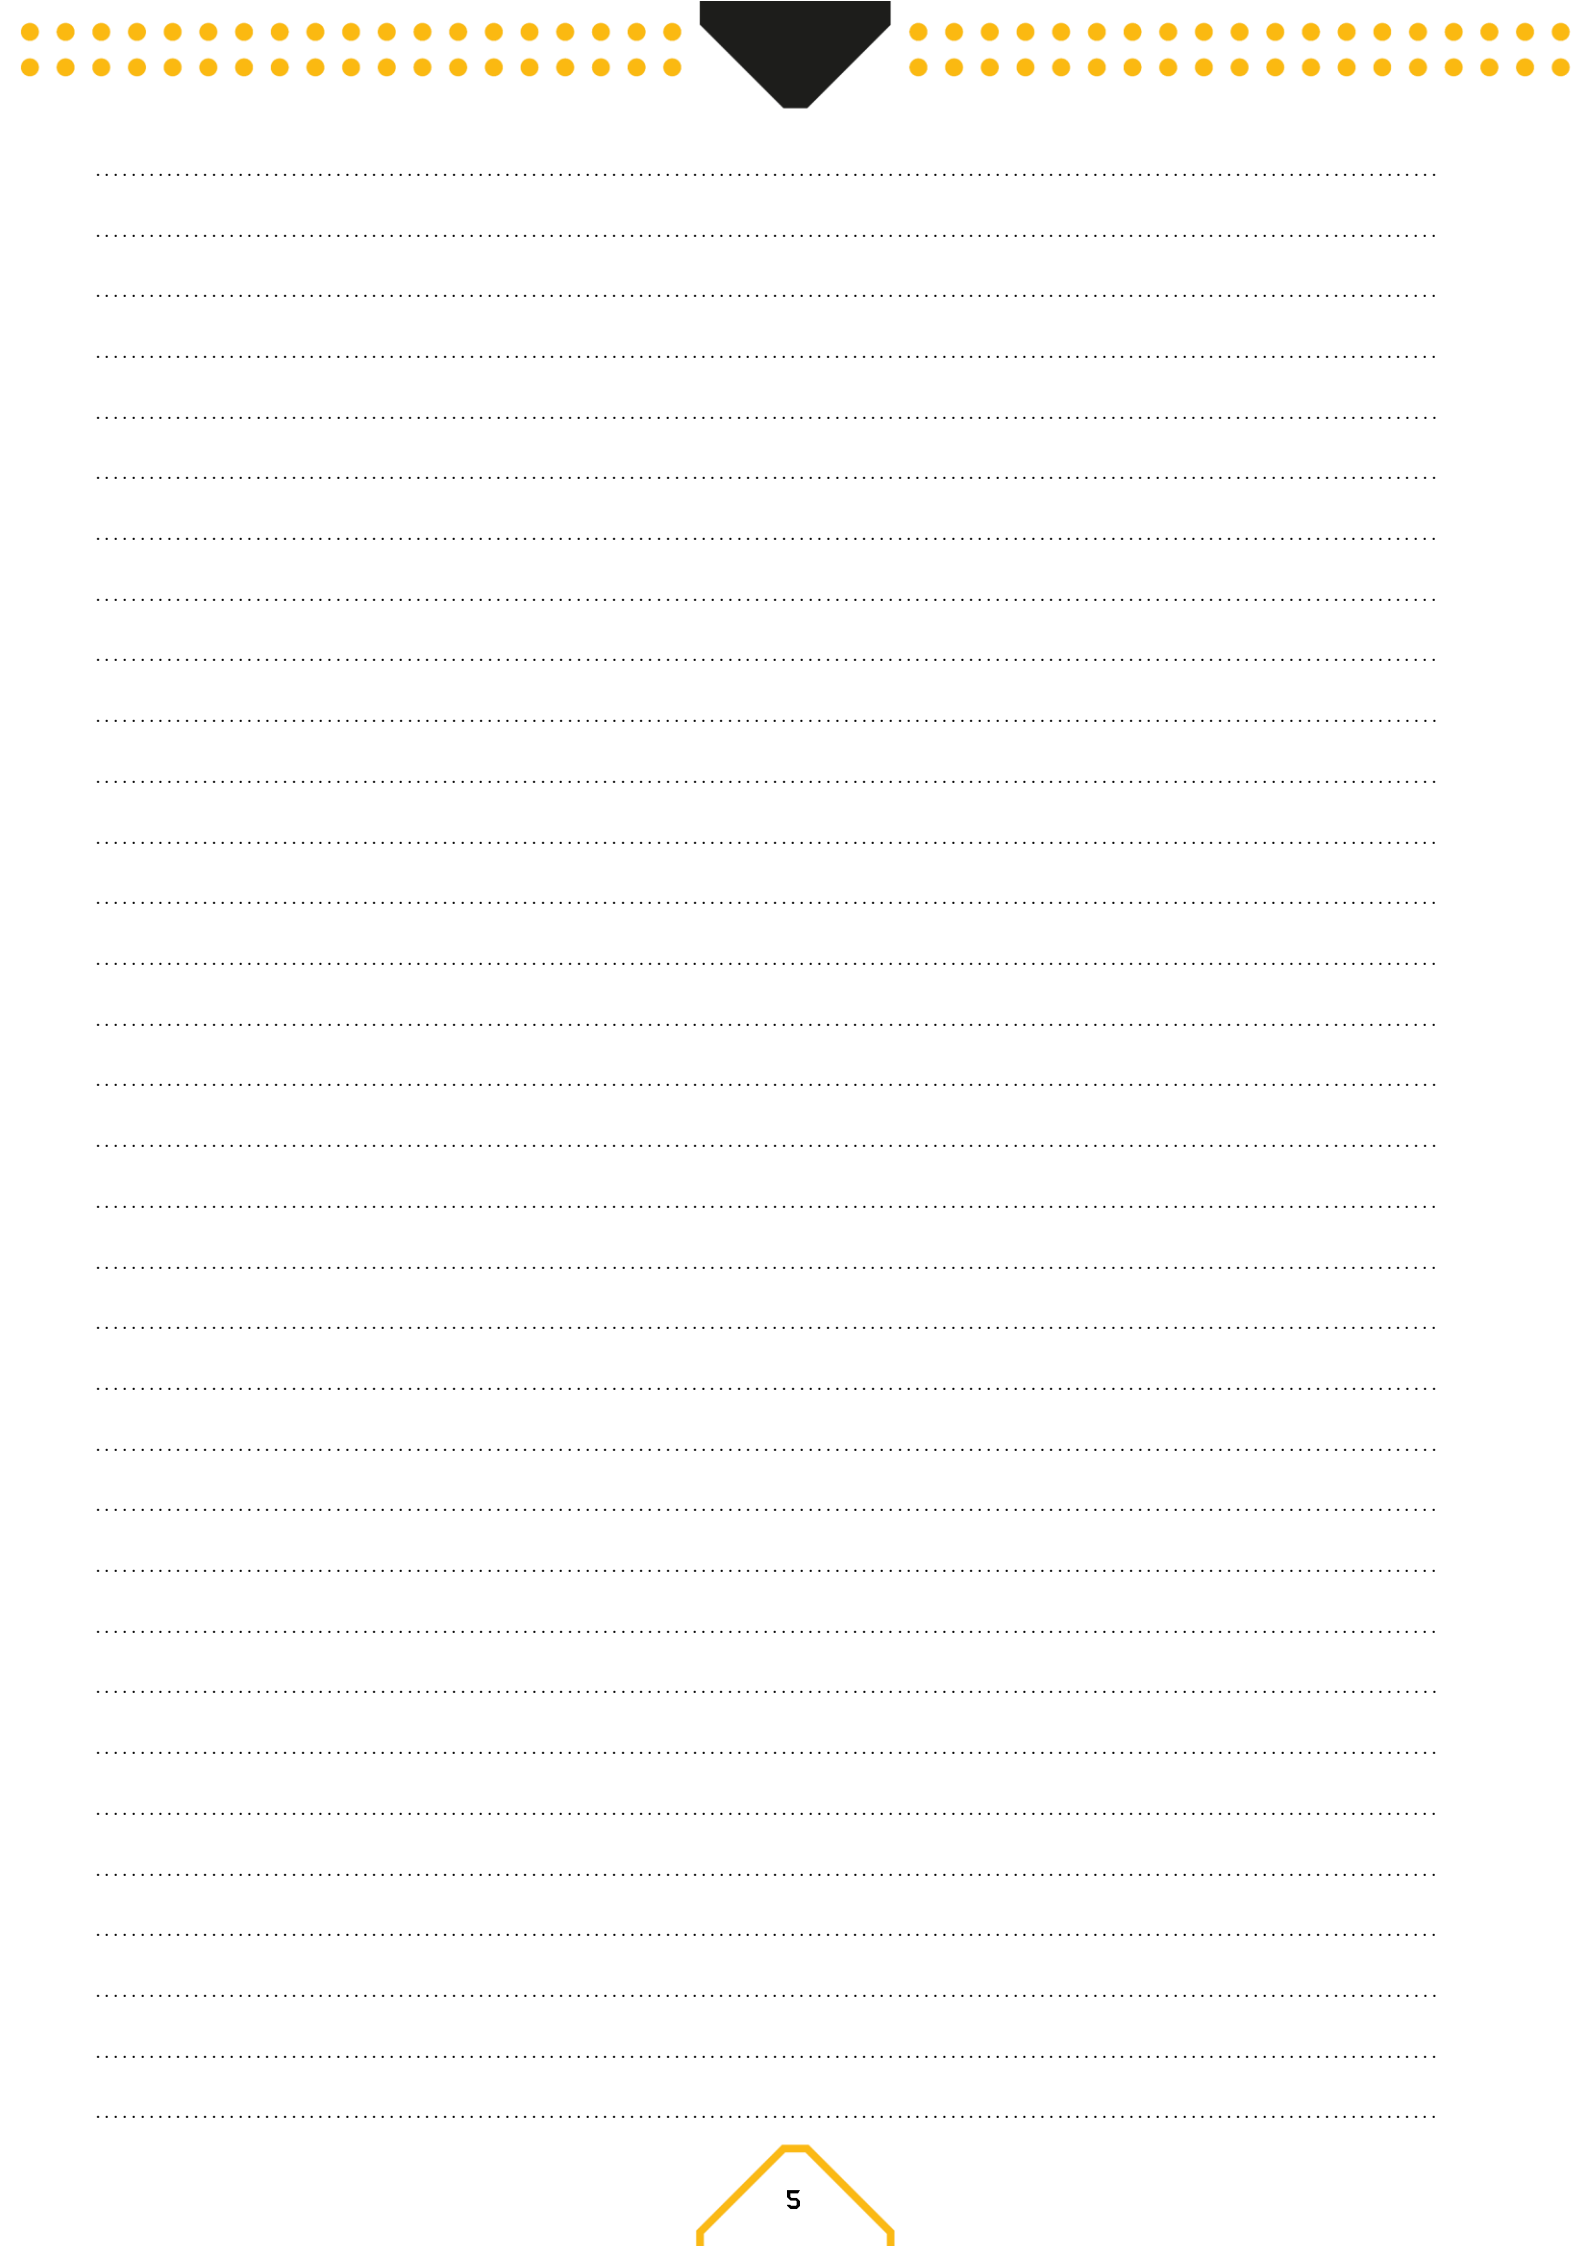



Handwriting practice lines consisting of 20 horizontal dotted lines.



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



BEAMZLIGHTING.COM