



**BEAMZ**  
**MADE**  
**EAZY**

150.900 V2.0

**SLIMPAR 35**

**QUICK START GUIDE**

## CONTROL MENU

| MENU            |      |            | DESCRIPTION                                   |
|-----------------|------|------------|-----------------------------------------------|
| DMX mode        | Addr | 7CH        | d001-d512                                     |
|                 |      | 4CH        |                                               |
|                 |      | 3CH        |                                               |
| Static colours  | Stat | S 01-16    | Static colors                                 |
| Auto            | Auto | Au 1-2     | Auto program                                  |
| Sound           | Soun | So 1-2     | Sound Program                                 |
| Speed           | SPEE | SP 1-9     | Speed                                         |
| Mic Sensitivity | SEnS | SE 1-9     | MIC sensitivity                               |
| Edit colour     | Colo | r000-255   | Red (0-100%)                                  |
|                 |      | g000-255   | Green (0-100%)                                |
|                 |      | b000-255   | Blue (0-100%)                                 |
| Strobe          | Stro | Stro0-9    | Stro0-9: 0 for no strobe, 1-9 for strobe rate |
| Dimming         | dIMM | dl 1- dl 9 | Master dimming                                |
| Silent scene    | SILE | on/oFF     | Silent scene by Sound program                 |
| Slave           | SLAV | Slave      | Slave                                         |

# DMX CHANNELS

## 7 CHANNELS

| CHANNEL | FUNCTION     | VALUE   | DESCRIPTION                  |
|---------|--------------|---------|------------------------------|
| 1       | Dimming      | 000-255 | Master dimming               |
| 2       | Strobe       | 000-009 | No strobe                    |
|         |              | 010-255 | Strobe from slow to fast     |
| 3       | Red          | 000-255 | Red 0-100%                   |
| 4       | Green        | 000-255 | Green 0-100%                 |
| 5       | Blue         | 000-255 | Blue 0-100%                  |
| 6       | Colour macro | 000-009 | No function                  |
|         |              | 010-019 | Red                          |
|         |              | 020-029 | Green                        |
|         |              | 030-039 | Blue                         |
|         |              | 040-049 | Yellow                       |
|         |              | 050-059 | Magenta                      |
|         |              | 060-069 | Cyan                         |
|         |              | 070-079 | Dark orange                  |
|         |              | 080-089 | Green yellow                 |
|         |              | 090-099 | Salmon                       |
|         |              | 100-109 | Turquoise                    |
|         |              | 110-119 | Light Green                  |
|         |              | 120-129 | Orange                       |
|         |              | 130-139 | Lavender                     |
|         |              | 140-149 | Light blue                   |
|         |              | 150-159 | Dark blue                    |
|         |              | 160-255 | Pink                         |
| 7       | Sound        | 000-009 | No function                  |
|         |              | 010-069 | Colour blending (rate)       |
|         |              | 070-129 | Colour change (rate)         |
|         |              | 130-189 | Sound colour blending (rate) |
|         |              | 190-255 | Sound colour change (rate)   |

#### 4 CHANNELS


| CHANNEL | FUNCTION     | VALUE   | DESCRIPTION                  |
|---------|--------------|---------|------------------------------|
| 1       | Dimming      | 000-255 | Master dimming               |
| 2       | Strobe       | 000-009 | No strobe                    |
|         |              | 010-255 | Strobe from slow to fast     |
| 3       | Colour macro | 000-009 | No function                  |
|         |              | 010-019 | Red                          |
|         |              | 020-029 | Green                        |
|         |              | 030-039 | Blue                         |
|         |              | 040-049 | Yellow                       |
|         |              | 050-059 | Magenta                      |
|         |              | 060-069 | Cyan                         |
|         |              | 070-079 | Dark orange                  |
|         |              | 080-089 | Green yellow                 |
|         |              | 090-099 | Salmon                       |
|         |              | 100-109 | Turquoise                    |
|         |              | 110-119 | Light Green                  |
|         |              | 120-129 | Orange                       |
|         |              | 130-139 | Lavender                     |
|         |              | 140-149 | Light blue                   |
|         |              | 150-159 | Dark blue                    |
|         |              | 160-255 | Pink                         |
| 4       | Sound        | 000-009 | No function                  |
|         |              | 010-069 | Colour blending (rate)       |
|         |              | 070-129 | Colour change (rate)         |
|         |              | 130-189 | Sound colour blending (rate) |
|         |              | 190-255 | Sound colour change (rate)   |


#### 3 CHANNELS

| CHANNEL | FUNCTION | VALUE   | DESCRIPTION  |
|---------|----------|---------|--------------|
| 1       | Red      | 000-255 | Red 0-100%   |
| 2       | Green    | 000-255 | Green 0-100% |
| 3       | Blue     | 000-255 | Blue 0-100%  |



Handwriting practice lines consisting of 20 horizontal dotted lines.

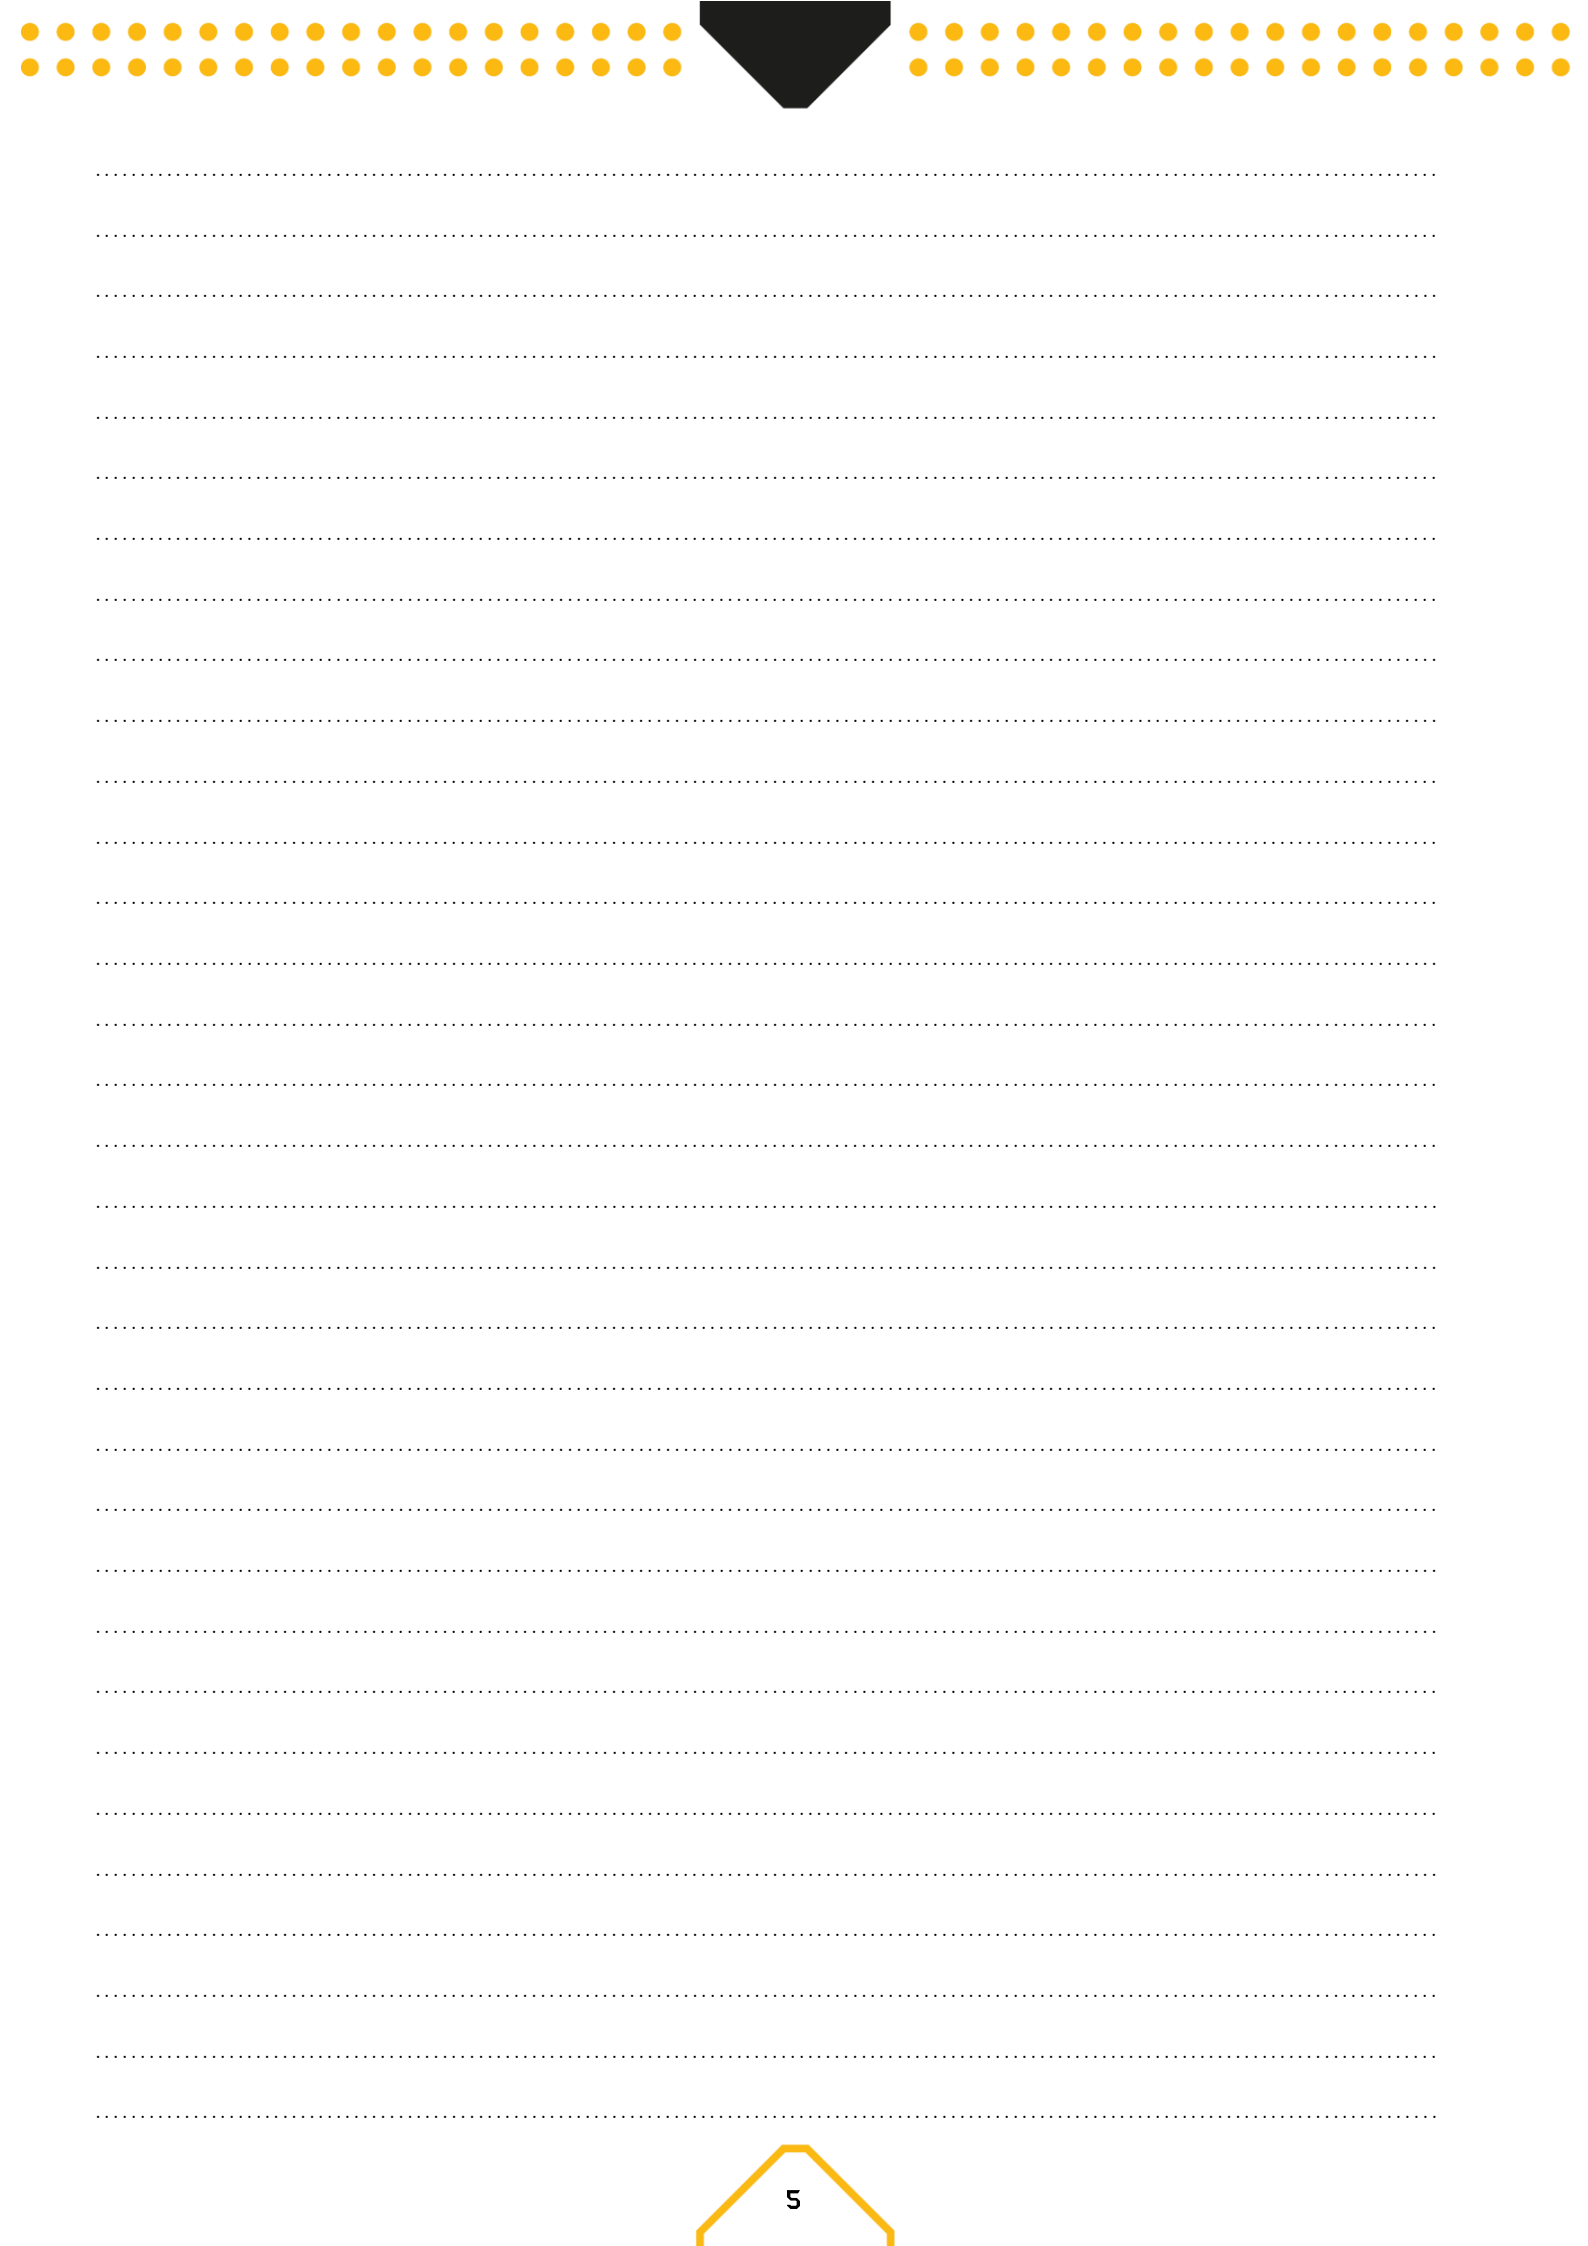

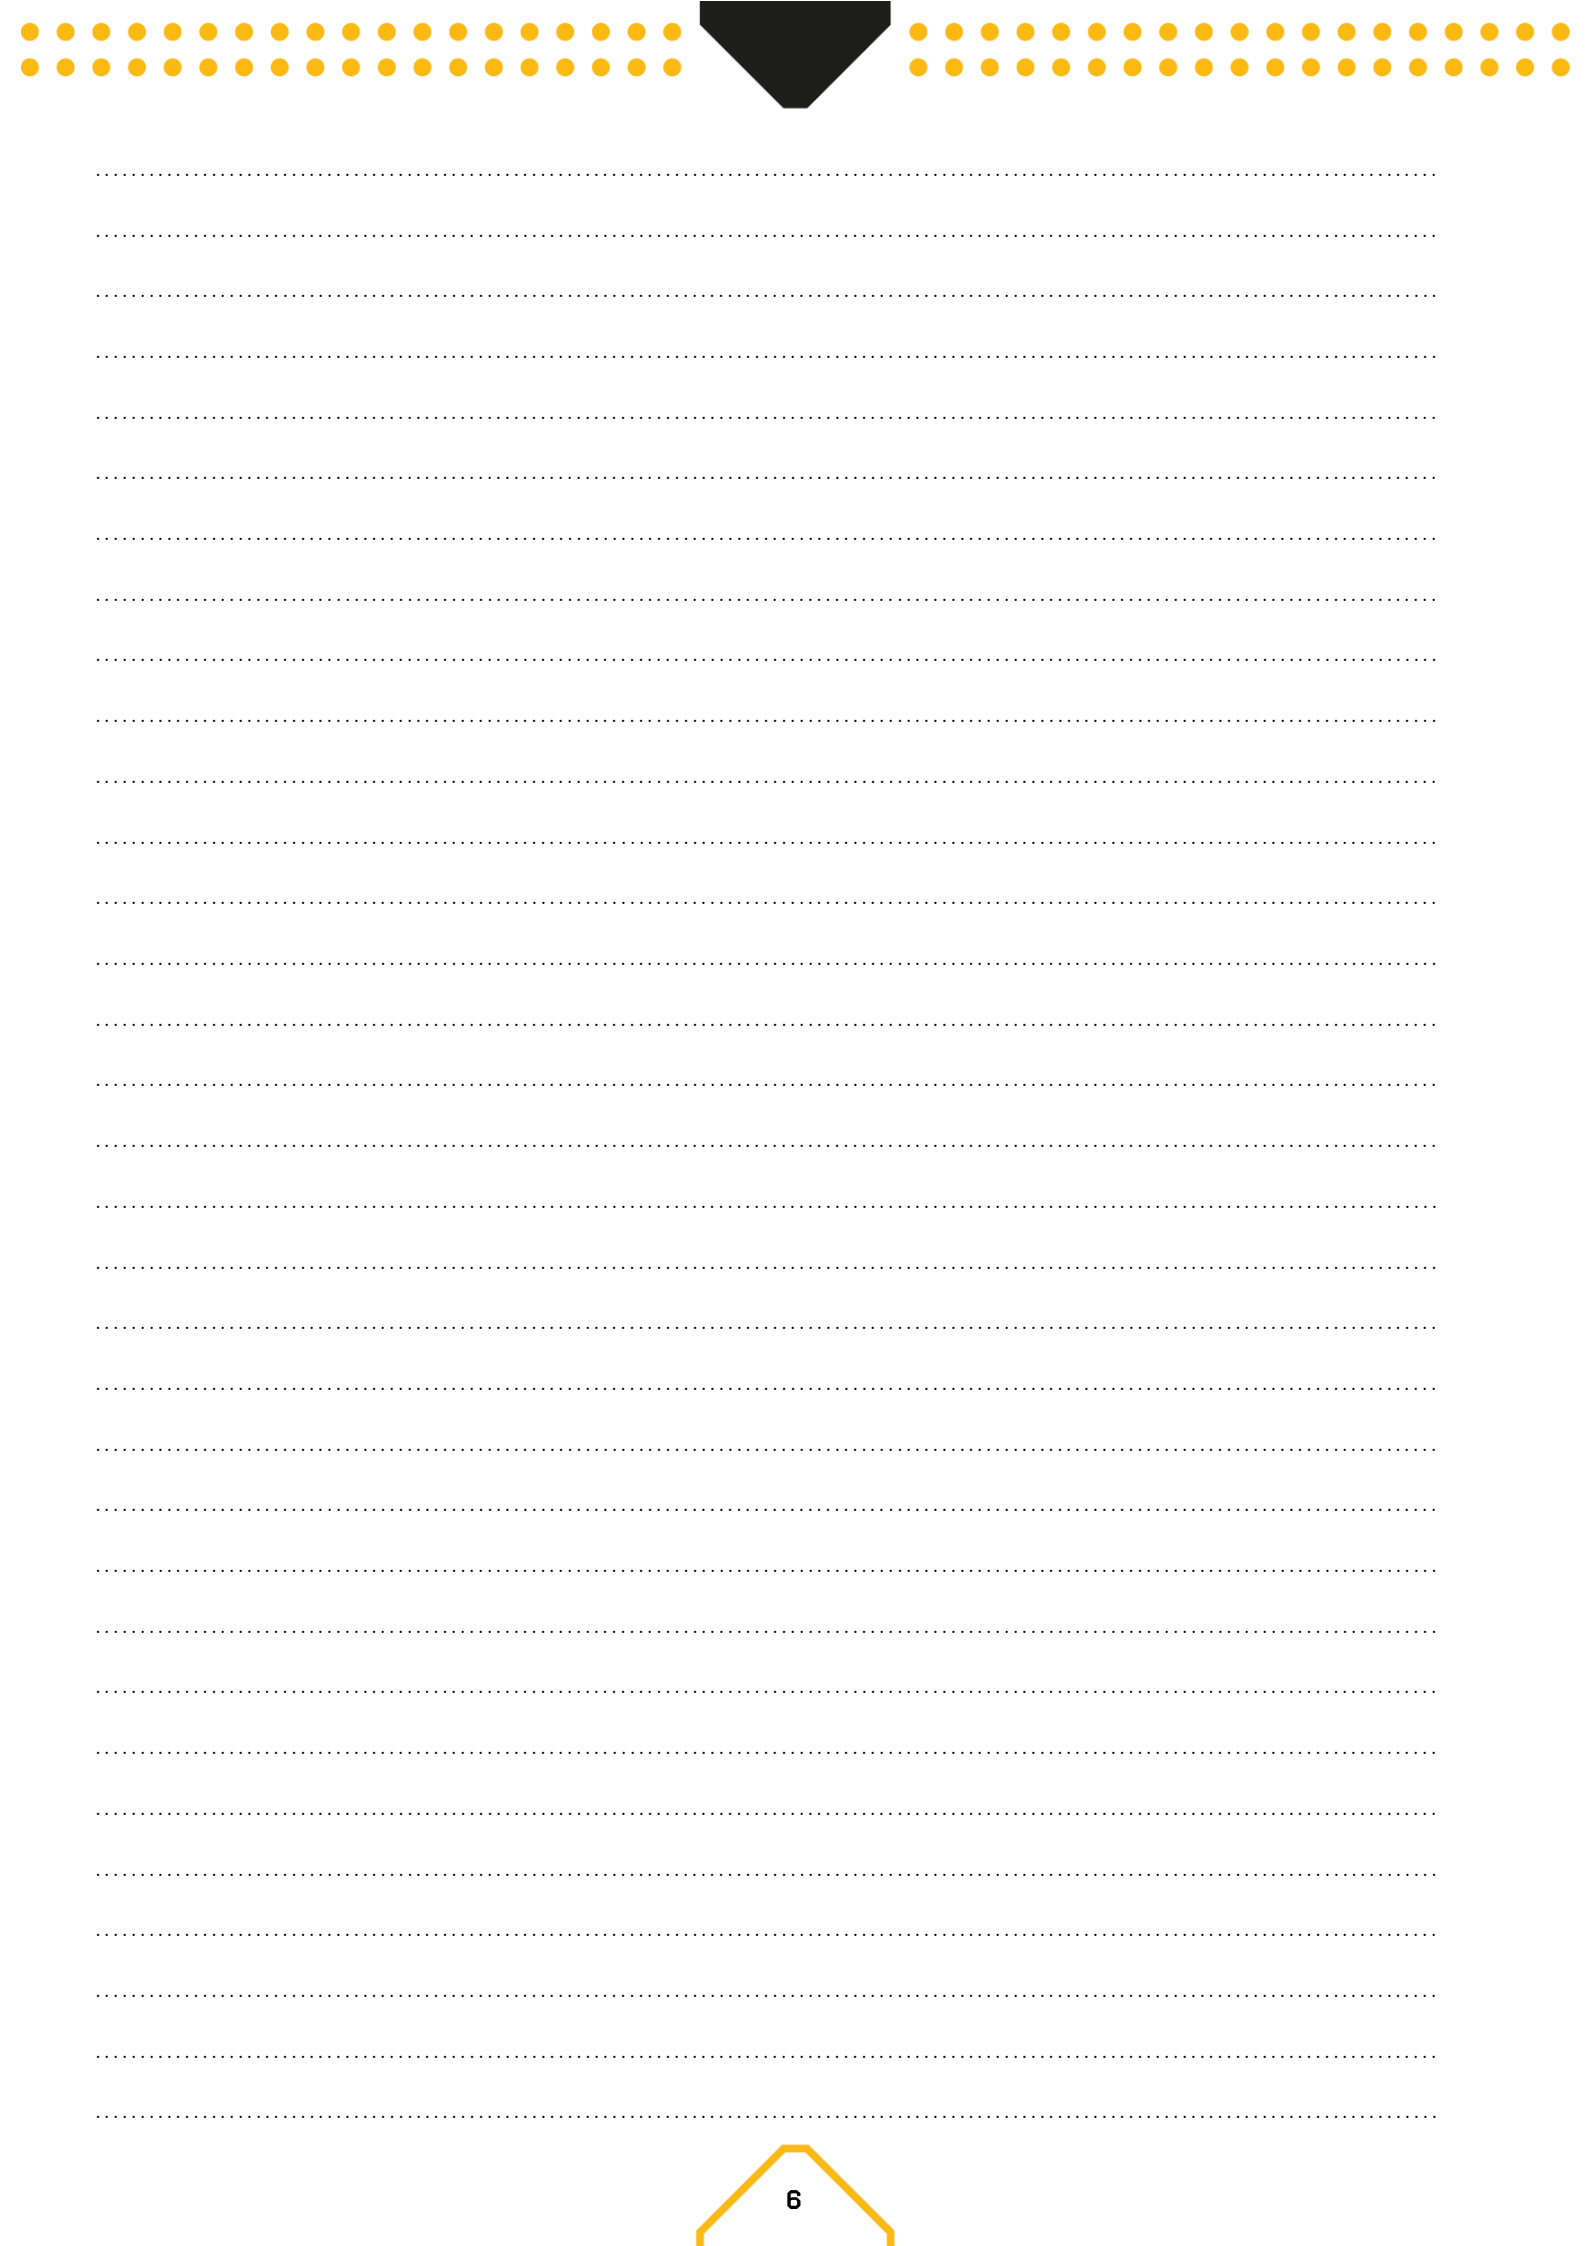



# BEAMZ

**YOUR FUTURE**  
**YOUR SKILLS**  
**YOUR PLATFORM**  
**YOUR PARTY**  
**YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



**BEAMZLIGHTING.COM**