



BEAMZ
MADE
EAZY


150.804_150.824 V1.0

BAC324 & 334

QUICK START GUIDE

CONTROL MENU

If the display is in standby, unlock it:



MENU		DESCRIPTION	
DMX ADDR		001-512	DMX address setting
CHANNEL		6 channels	DMX channel mode
		8 channels	
		10 channels	
		11 channels	
DIMMER CURVE		Dim curve 1	Select dimmer curve
		Dim curve 2	
		Dim curve 3	
		Dim curve 4	
DMX STATE		Blackout/Hold	Select DMX status when signal lost.
STATIC COLOUR		01-32	Static colour
JUMP MODE		1-09	Speed from slow to fast
FADE MODE		1-09	Speed from slow to fast
PULSE MODE		1-09	Speed from slow to fast
SOUND MODE	Sub Mode	1-04	Sound mode 1-4
	Sensitivity	1-09	Adjust sensitivity
MANUAL MODE	Red	000-255	Dimmer Red
	Green	000-255	Dimmer Green
	Blue	000-255	Dimmer Blue
	White	000-255	Dimmer White
	Amber	000-255	Dimmer Amber
	UV	000-255	Dimmer UV
	Shutter	000-009	Speed from slow to fast
SET UP	Key Lock	OFF/ON	Enable/disable button lock function
	Remote	OFF/ON	Enable/disable infrared remote function
	Display	10s/20s/30S/ Always ON	Display standby time
	Reset	YES/NO	Reset system
INFORMATION	Model	BAC series	Product model
	Colour	RGBXXX	LED mix colour
	Software	V0.01	Software version
	Hardware	QY-XXX	Hardware version
	Work Time	xxxx.xH	Current running time
	Total Time	xxxx.xH	Total running time

DMX CHANNELS

6 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	RED	000-255	Dimmer Red 0-100%
2	GREEN	000-255	Dimmer Green 0-100%
3	BLUE	000-255	Dimmer Blue 0-100%
4	WHITE	000-255	Dimmer White 0-100%
5	AMBER	000-255	Dimmer Amber 0-100%
6	UV	000-255	Dimmer UV 0-100%

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	WHITE	000-255	Dimmer White 0-100%
6	AMBER	000-255	Dimmer Amber 0-100%
7	UV	000-255	Dimmer UV 0-100%
8	STROBE	000-009	No Function
		010-255	Strobe from slow to fast

10 CHANNELS


CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	WHITE	000-255	Dimmer White 0-100%
6	AMBER	000-255	Dimmer Amber 0-100%
7	UV	000-255	Dimmer UV 0-100%
8	STROBE	000-009	No Function
		010-255	Strobe from slow to to fast
		000-020	No function
		021-050	Static colour (colour is controlled by CH8)
		051-080	Jump mode
		081-110	Fade mode
		111-140	Pulse mode
		141-170	Sound mode 1
		171-200	Sound mode 2
		201-230	Sound mode 3
9	MODE	231-255	Sound mode 4
		000-255	Speed from slow to fast (CH7=051-140)
		000-255	Static colour as form-1 (CH7=021-050)
		000-255	Sensitive (CH7=141-255)
10	CONTROLE MODE		


11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	DIMMER	000-255	Master Dimmer 0-100%
2	RED	000-255	Dimmer Red 0-100%
3	GREEN	000-255	Dimmer Green 0-100%
4	BLUE	000-255	Dimmer Blue 0-100%
5	WHITE	000-255	Dimmer White 0-100%
6	AMBER	000-255	Dimmer Amber 0-100%
7	UV	000-255	Dimmer UV 0-100%
8	STROBE	000-009	No Function
		010-255	Strobe from slow to to fast
		000-020	No function
		021-050	Static colour (colour is controlled by CH8)
		051-080	Jump mode
		081-110	Fade mode
		111-140	Pulse mode
		141-170	Sound mode 1
		171-200	Sound mode 2
		201-230	Sound mode 3
9	MODE	231-255	Sound mode 4
		000-255	Speed from slow to fast (CH7=051-140)
		000-255	Static colour as form-1 (CH7=021-050)
		000-255	Sensitive (CH7=141-255)
10	CONTROLE MODE	000-063	No Function
		000-063	Dimmer curve 1
		064-127	Dimmer curve 2
		128-191	Dimmer curve 3
		192-255	Dimmer curve 4
11	DIMMING CURVE		

*When Channel 7 is on:

VALUE	DESCRIPTION	VALUE	DESCRIPTION
000-007	Static colour 1	128-135	Static colour 17
008-015	Static colour 2	136-143	Static colour 18
016-023	Static colour 3	144-151	Static colour 19
024-031	Static colour 4	152-159	Static colour 20
032-039	Static colour 5	160-167	Static colour 21
040-047	Static colour 6	168-175	Static colour 22
048-055	Static colour 7	176-183	Static colour 23
056-063	Static colour 8	184-191	Static colour 24
064-071	Static colour 9	192-199	Static colour 25
072-079	Static colour 10	200-207	Static colour 26
080-087	Static colour 11	208-215	Static colour 27
088-095	Static colour 12	216-223	Static colour 28
096-103	Static colour 13	224-231	Static colour 29
104-111	Static colour 14	232-239	Static colour 30
112-119	Static colour 15	240-247	Static colour 31
120-127	Static colour 16	248-255	Static colour 32

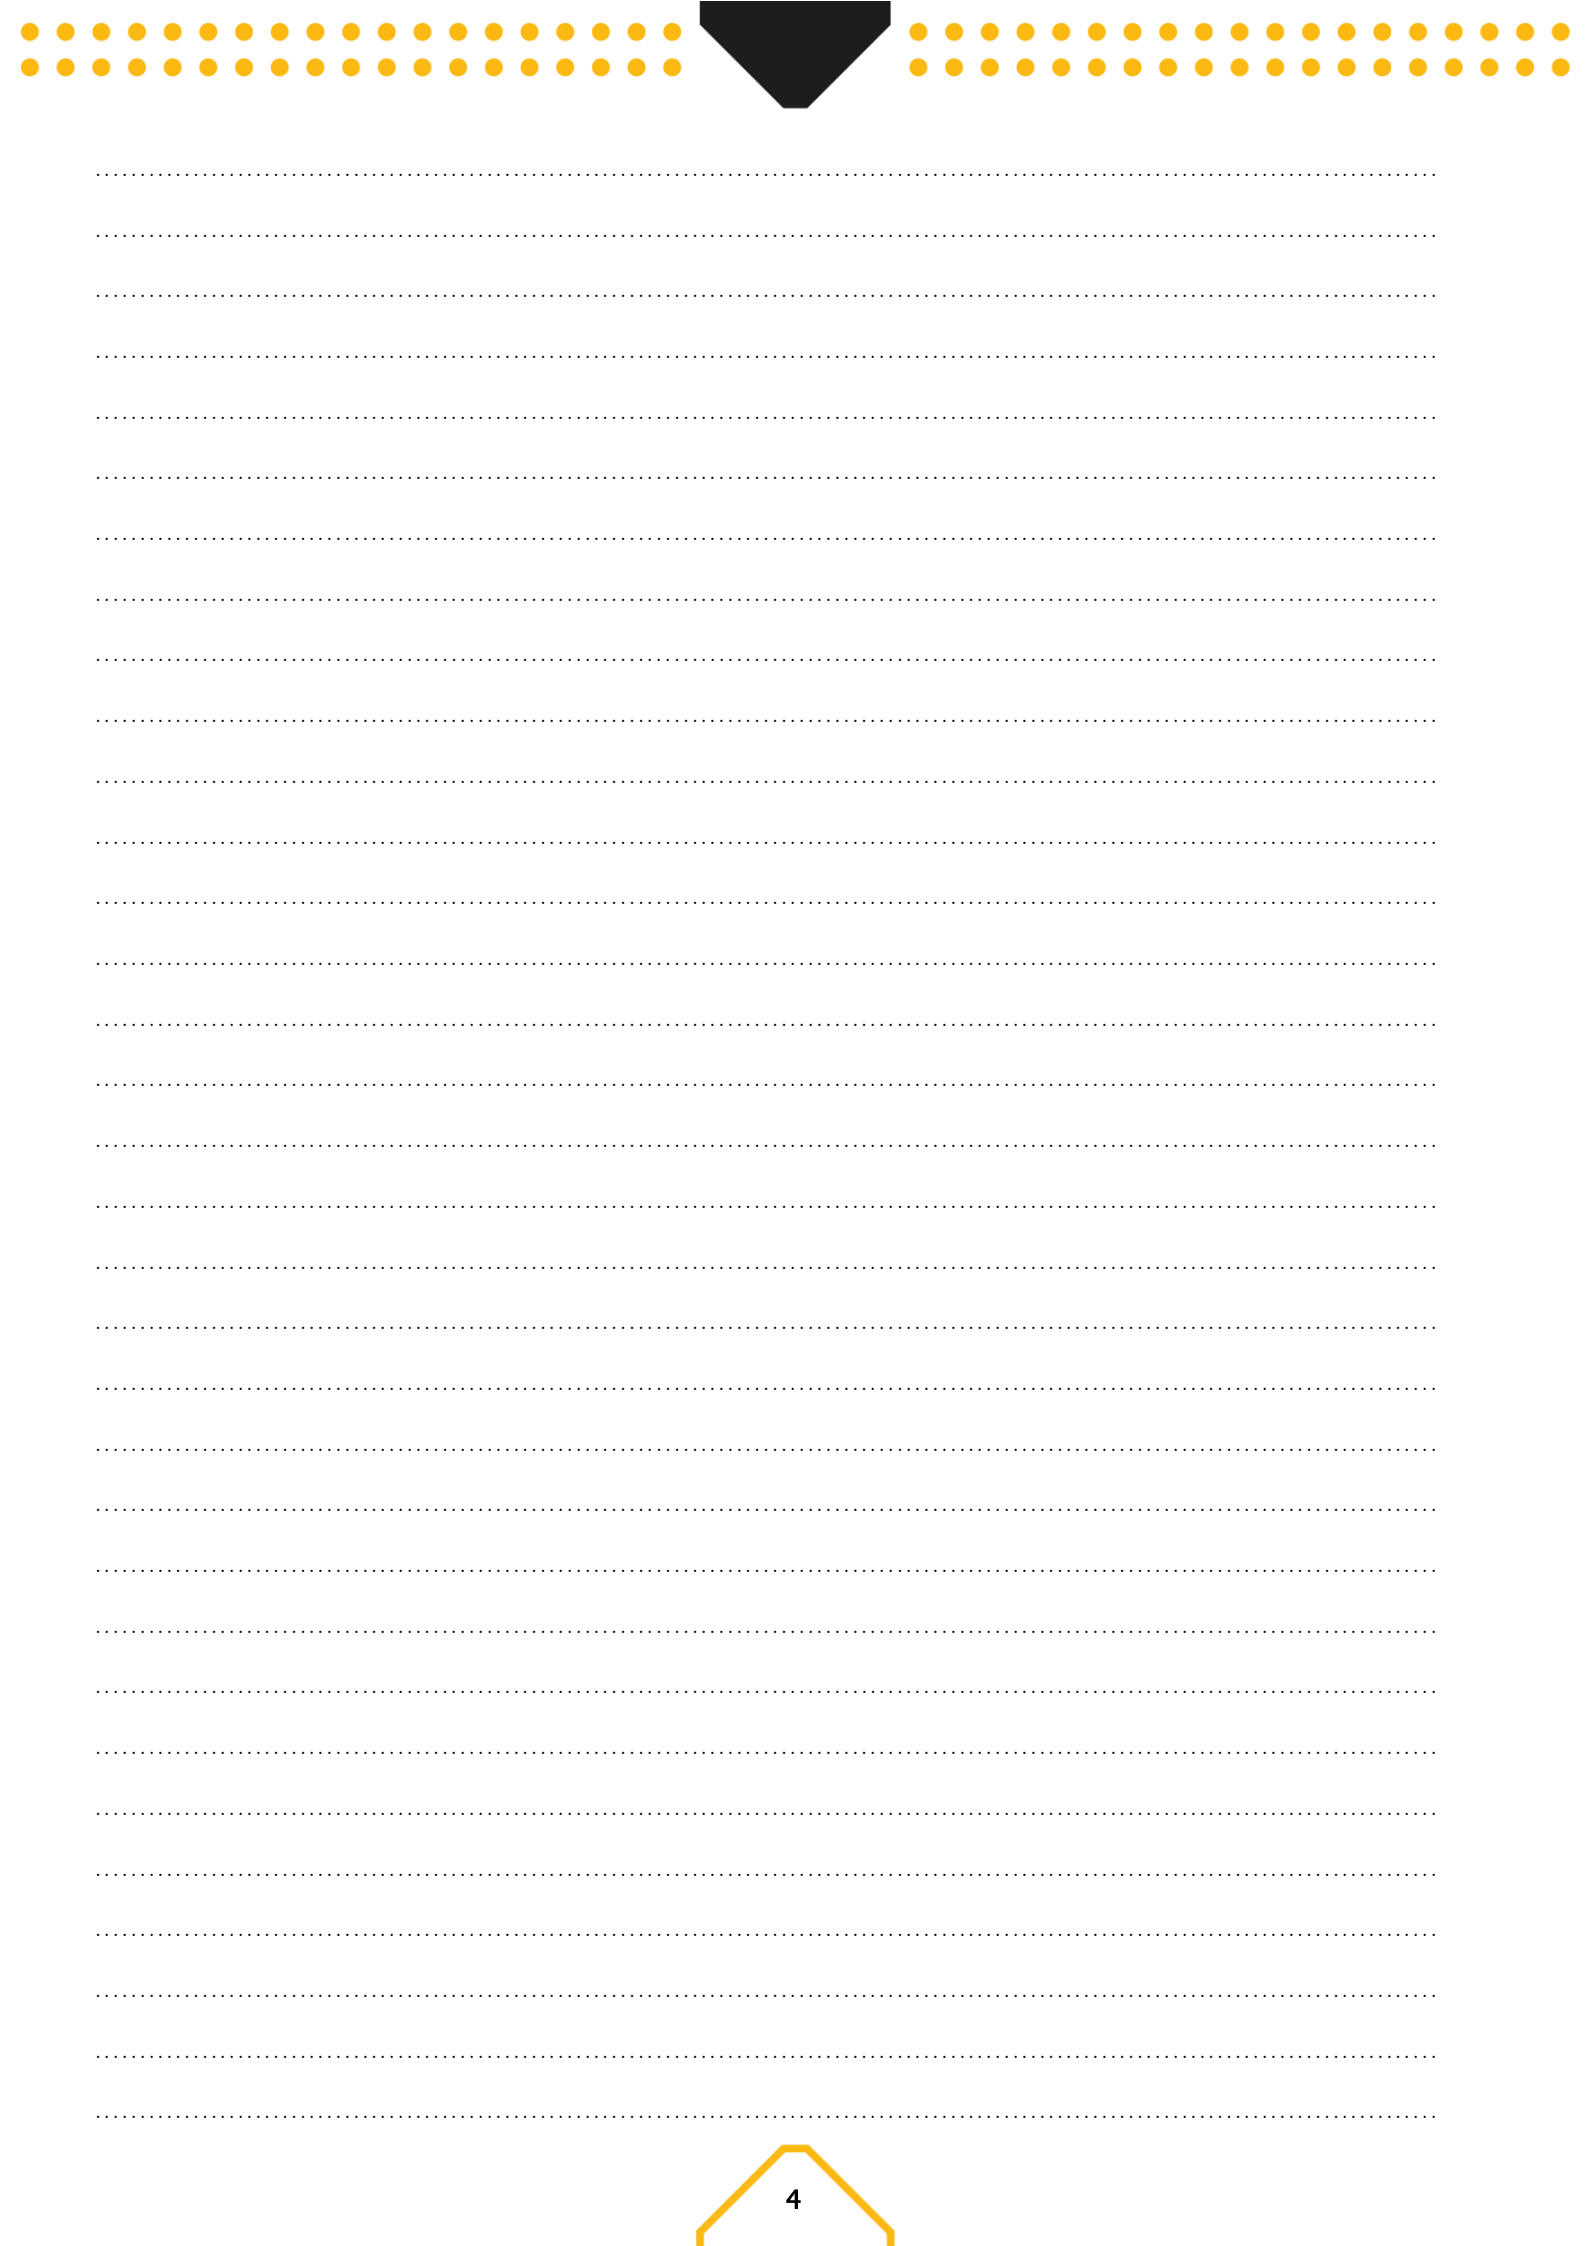

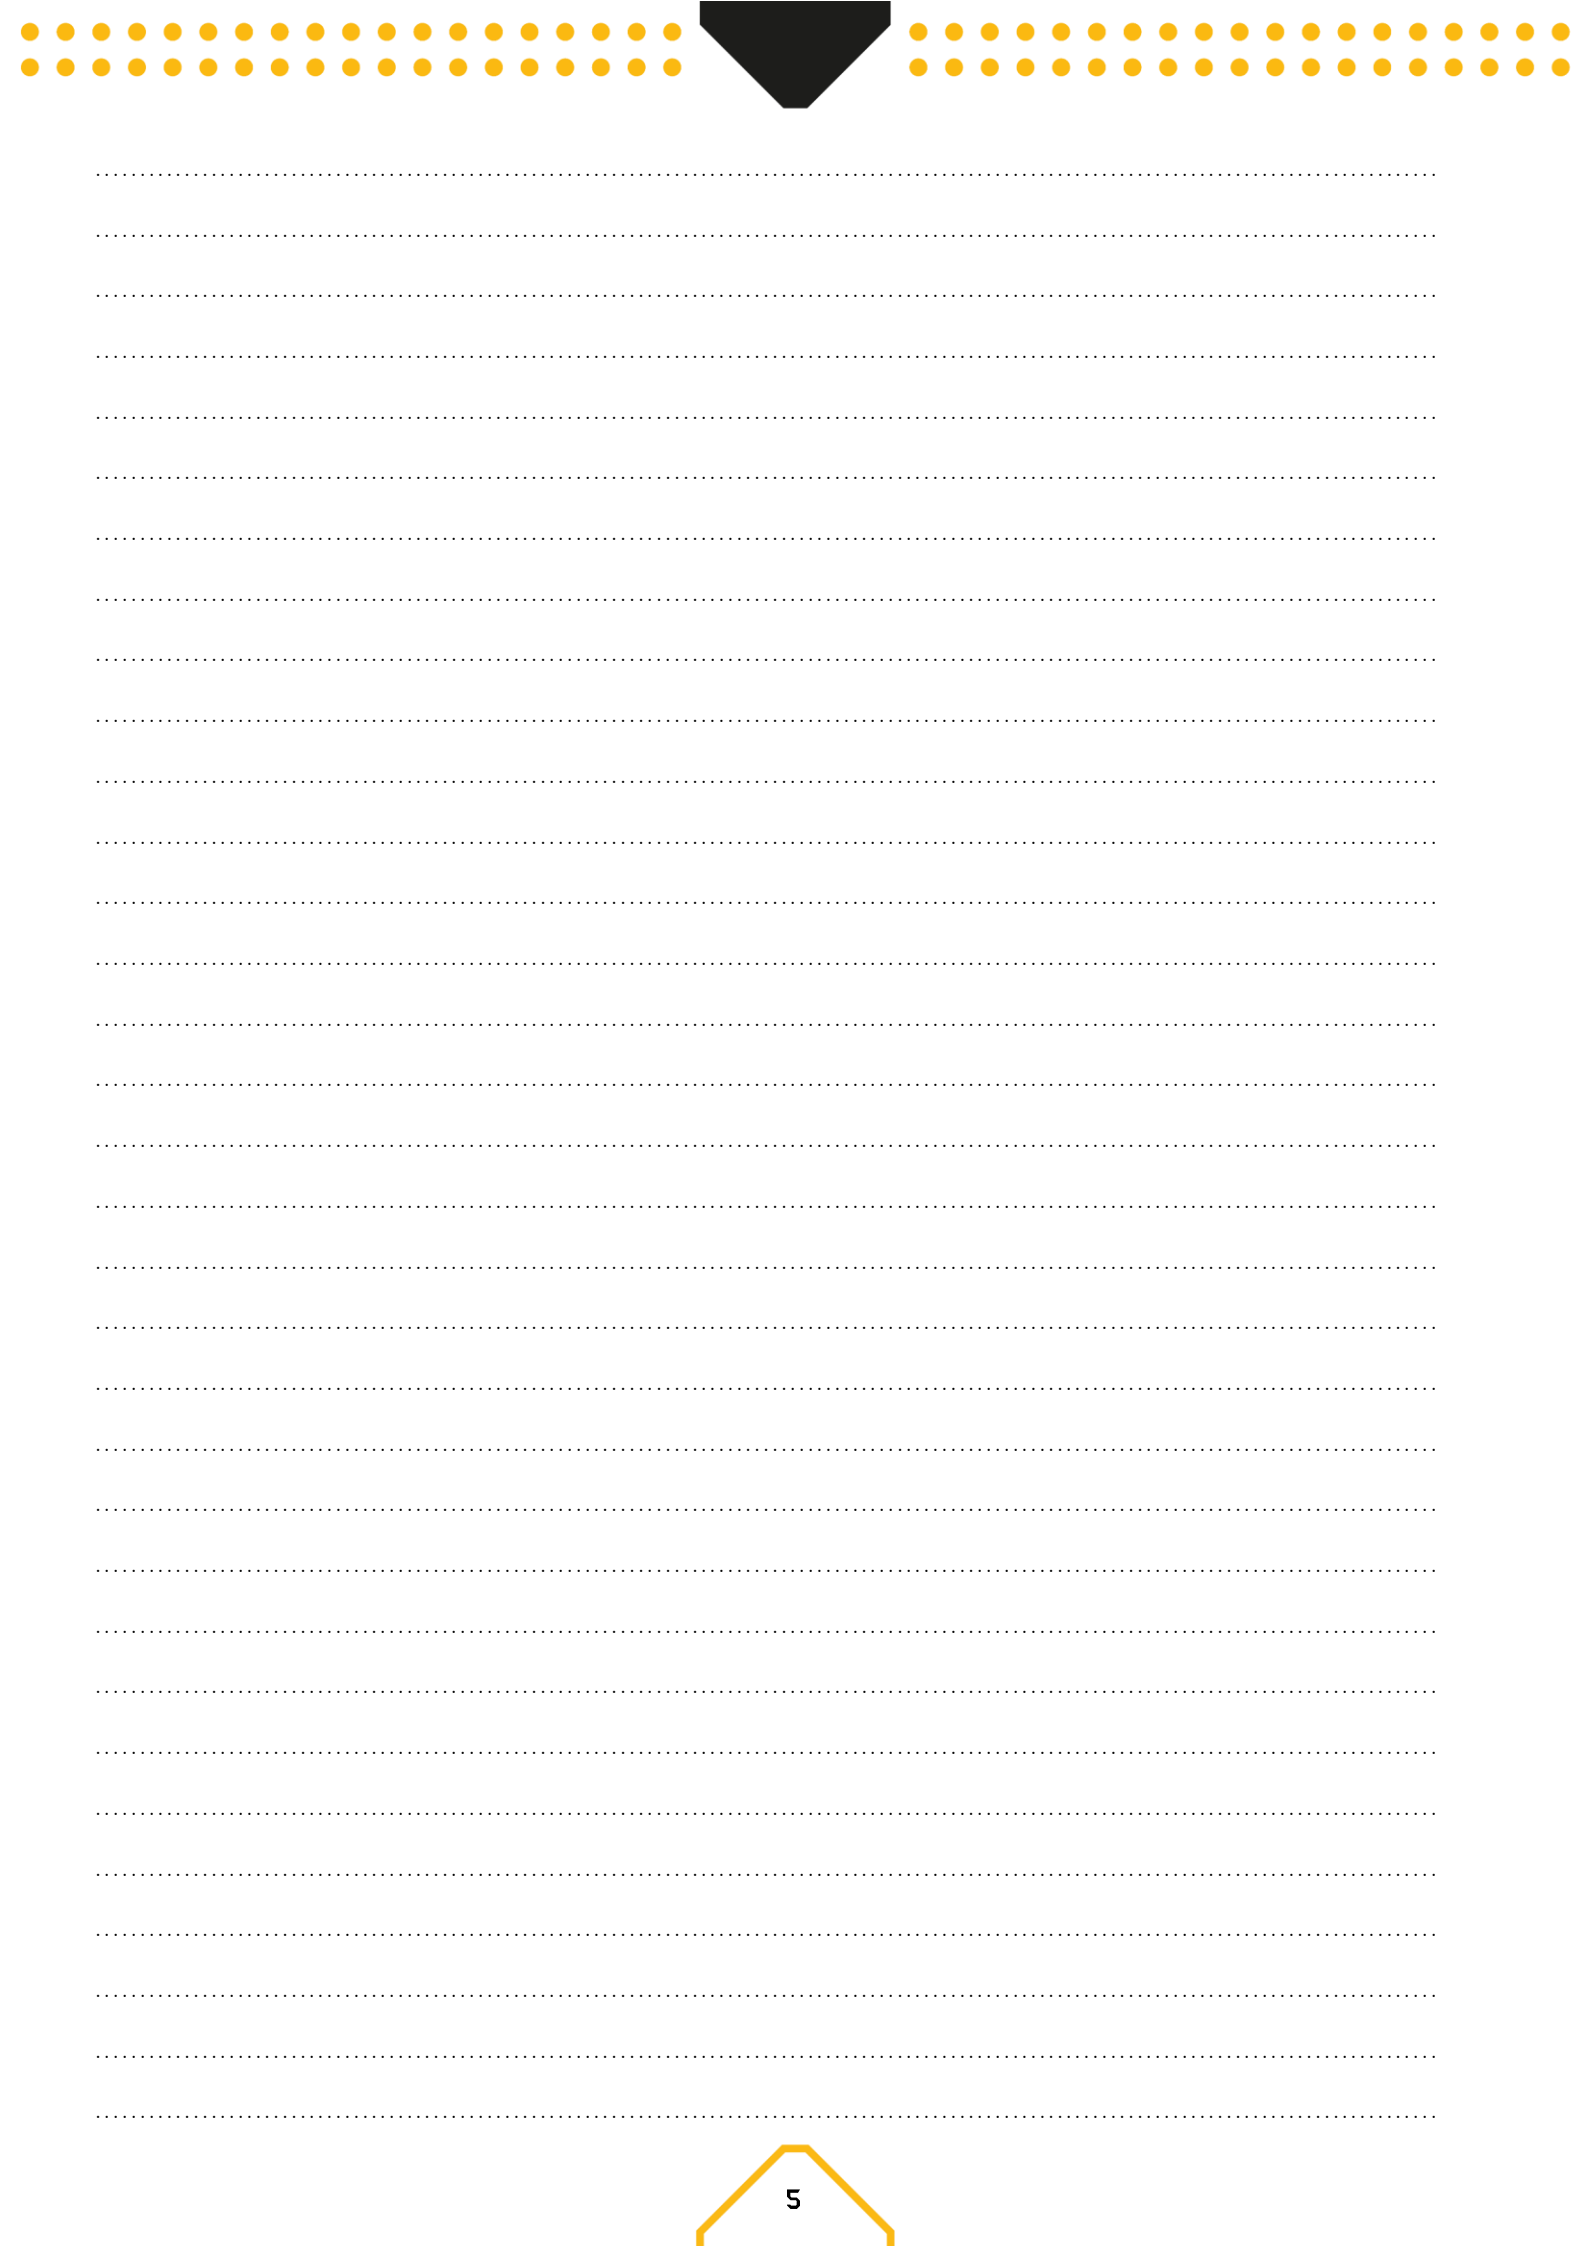



Handwriting practice lines consisting of 20 horizontal dotted lines.



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT

 **beamZ^{Pro}**

offers a wide range of high performance lighting equipment and related accessories for the rental, entertainment and architectural lighting markets. BeamZ Pro stands for performance, innovation and value pricing!



BEAMZLIGHTING.COM



150.812 **beamZ** Pro

BAC32F Filter 40 Degree

40 Degree frost filter accessory for the BAC32x fixture.

Product colour : Black, Transparent
Dimensions (L x W x H) : 165 x 165 x 8mm
Weight (kg) : 0,05

- For use with the BAC32x
- Creates a 40° Beam Angle
- Material: acrylic